




**THM-I**

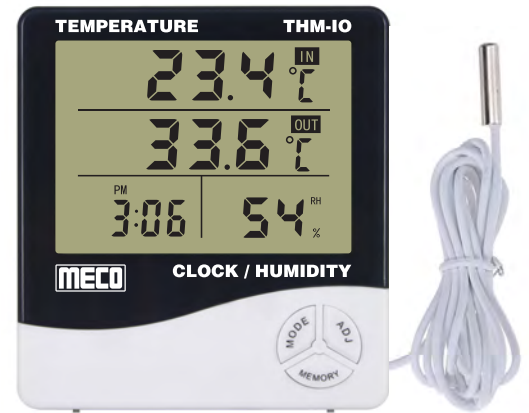

**THM-IO**

### Applications

- Home, Office
- Laboratory
- Hospital
- Green House
- Hotels and many more...

### Specifications

Functions	°C / °F Selection, MAX / MIN, Integral Hour Alarm, Clock & Calendar	°C / °F Selection, MAX / MIN, Integral Hour Alarm, Clock & Calendar
Display	Temperature (Indoor), Humidity and Time Simultaneously	Temperature (Indoor & Outdoor), Humidity and Time Simultaneously
Temperature Range	Indoor -20°C ~ 70°C / -68°F ~ 158°F	Indoor -20°C ~ 70°C / -68°F ~ 158°F Outdoor -20°C ~ 90°C / -68°F ~ 194°F
Temperature Accuracy	± 1.0°C / ± 1.8°F	± 1.0°C / ± 1.8°F
Temperature Resolution	0.1°C / 0.2°F	0.1°C / 0.2°F
Humidity Range	10%RH - 99%RH	10%RH - 99%RH
Humidity Accuracy	± 5% (40%RH ~ 80%RH)	± 5% (40%RH ~ 80%RH)
Humidity Resolution	1%RH	1%RH
Power	1.5V AAA x 1	1.5V AAA x 1
Dimension	100 x 90 x 20mm (approx.)	100 x 90 x 20mm (approx.)
Weight	160gms (approx.)	160gms (approx.)
Accessories	Battery : 1.5V AAA x 1	Battery : 1.5V AAA x 1, Outdoor Sensor (1M Length)



**THM-MS**

### Applications

- Indoor and Outdoor
- Refrigerator
- Inside and Outside Car
- Fish Tank
- Pool Water Temperature and many more....

### Specifications

Display	LCD Display
Temperature Range	-50°C ~ 110°C / -58°F ~ 230°F
Temperature Accuracy	± 1.0°C / ± 1.8°F For Range :-20 ~ 100°C / 68 ~ 212°F
Temperature Resolution	0.1°C / °F
Power Supply	AG13, 3.0V x 2 Batteries
LCD Display Size	36 x 16mm (approx.)
Casing Size	60 x 40 x 20mm (approx.)
Panel Cut Out Size	46 x 27mm (approx.)
Weight	35gms (approx.)
Accessories	AG 13, 3.0V x 2 Batteries, Sensor (1M Length)