

Megger[®]

2023 | **Electrical Test
Equipment Catalog**





DID YOU KNOW?

STOCK CHECK

Megger offers you the convenience of checking inventory at an authorized stocking distributor's location. On our website, us.megger.com, simply click on the **Buy Now** button located on the pages featuring the products in this catalog.

Megger Products Applications Company Support Events Webinars Rentals & Leasing Enter your search term

Products > Cable fault, test and diagnostics > CATV and Telecom > Ground testing > DET14C and DET24C

DET14C and DET24C

GROUND RESISTANCE CLAMP TESTERS

OVERVIEW TECHNICAL

- Elliptical clamp shape improves access to earth cables and straps up to 50 mm
- Low maintenance flat jaw interface
- Measures ground resistance from 0.05 Ω to 1500 Ω
- Measures true RMS ground leakage current from 0.5 mA rms to 35 A rms
- CAT IV 600 V safety rating
- Backlit LCD display

The Megger DET14C and DET24C ground resistance clamp testers represent a new generation of earth/ground clamp-on resistance testers. These instruments induce a test current into earth systems and measure ground resistance in multi ground installations without needing to disconnect the ground. They offer market leading access, advanced features, simple operation and CAT IV 600 V safety protection.

This clamp-on stake-less ground tester can also:

- Balance elements of a ground to mitigate noise
- Balance ground circuits
- Measure continuity of ground circuits in headends and hubs

The elliptical shaped head design offers improved access to cables and earth straps in space constrained locations. The clamp head accommodates up to 37 mm diameter cable and 50 mm earth tapes making them suitable for use in power stations, substations, towers and many more facilities.

Product Documents

- ☒ Brochure - 2021 Electrical Test Equipment Catalog
- ☒ Application Notes - Application guide - Stake-less earth testing
- ☒ Data sheet - DET14C and DET24C
- ☒ Application Notes - Grounding - Better Reach
- ☒ User guide - DET14C

ASK A QUESTION OR **BUY NOW**

Megger - Part Search Result

Home > Megger - Part Search Result

Show 10 entries

Refine Your Search:

Part No.	Qty	Inv date	In Stock At	Phone	Country	RFQ	PO/Shop
DET24C	5	02-08-2022			United States	RFQ	BUY

Showing 1 to 1 of 1 Records

Previous 1 Next

Check Inventory

Part Number Search: Search

Match the starting portion of Part No.

Match this exact Part No.

Match any portion of Part No.(most comprehensive)

TABLE OF CONTENTS

5/10/15-KV INSULATION TEST EQUIPMENT.....	4	TIME DOMAIN REFLECTOMETERS.....	48
MIT1525	4	CFL535G Time Domain Reflectometer	48
MIT 5/10-kV	5	TDR2010 Time Domain Reflectometer	48
2.5 KV INSULATION TEST EQUIPMENT	7	TDR2050 Time Domain Reflectometer	48
MIT2500	7	CFL510G Time Domain Reflectometer	49
1-KV INSULATION TEST EQUIPMENT	8	TDR500/3	49
MIT400/2 SERIES	8	CABLE AND PIPE LOCATOR.....	50
MIT300 Series	9	EASYLOC	50
MIT200 Series	9	THERMAL CAMERA.....	51
MAJOR MEGGER INSULATION TESTERS	11	TC3231 Thermal Camera	51
Additional Insulation Test Equipment	11	POWER QUALITY.....	52
GROUND RESISTANCE TEST EQUIPMENT	12	MPQ1000	52
DET2/3	12	MPQ1000 Basic Kit.....	53
Earth Testing Kits.....	13	MPQ1000 Silver Kits.....	53
DET3 Contractor Series	14	MPQ1000 Gold Kits	53
DET4T2 Enhanced Series	15	MPQ1000 PLATINUM KITS.....	53
DET14C and DET24C	16	BATTERY TEST EQUIPMENT	54
MULTIFUNCTION TESTER	17	BITE5.....	54
MFT70	17	BITE3.....	55
SUBSTATION TEST EQUIPMENT.....	17	BITE2 and BITE2P.....	55
MPD Scan Set Dis.....	17	PORTABLE APPLIANCE TESTERS	56
Single-phase, Hand-crank TTR	18	PAT450.....	56
MTO106 Transformer ohmmeter	18	PAT320.....	56
LOW RESISTANCE OHMMETERS.....	19	SPECIALITY TESTING	57
DLRO2	19	Cable Height Meter.....	57
DLRO-10 and DLRO-10X	20	High-Pot Testers	57
DLRO10HD.....	20	MLM50 Laser Distance Meter	57
DLRO10HDX	20	Three-phase sequence	58
DLRO100 Series.....	21	Cable Phasing Meter	58
Optional Accessory.....	22	Phase Sequence Test Sets	58
DLRO10LPU line power unit	22	MOTOR TEST EQUIPMENT.....	59
DLRO200 Series.....	22	MTR105	59
General Purpose DLROs (247000 Series)	23	Motor & Phase Rotation Test Sets	59
MOM2 Handheld Micro-ohmmeter	23	SAFETY TEST EQUIPMENT	60
100A Kelvin Clamps	25	Voltage Detectors and Phasing Tester	60
Industrial Application Kit	25	DETEX® Voltage Detectors.....	60
DLRO Leads.....	26	DETEX® Phasing Tester.....	60
RENEWABLE PRODUCTS	27	DETEX® Single-Pole Phase Comparator	60
Solar Applications Products.....	28	Pneumatic Glove Tester	61
Wind Application Products	37	TEST AND MEASUREMENT SOFTWARE	61
MULTI-METERS/CLAMP-ONS AND TESTERS	46	POWER DB.....	61
DCM310, DCM320, DCM340 Clampmeters.....	46	MISCELLANEOUS TESTING EQUIPMENT	62
DCM1500 1500 A TRMS clamp meter.....	46	MFL205 Fuse Locator	62
DCM305E	46	MSL10 Stud Locator	62
DPM1000 Power clamp meter.....	46	LA-KIT Adaptor Kit	62
AVO215	46	MCT105 Cable Locator	62
TPT420 CATIV 1000V 2 Pole Tester.....	47	CROSS-REFERENCE GUIDE	63
MPU690 Proving Unit.....	47		
MET1000 True RMS Electrical Tester.....	47		
AC Voltage Detectors	47		



PRODUCTS MARKED WITH THIS LOGO WERE MANUFACTURED IN AN ISO 14001 COMPLIANT FACILITY.

Electrical Test Equipment Catalog

5/10/15-kV INSULATION TEST EQUIPMENT

Equipment with operating voltages above 1 kV requires commensurately higher test voltages. To be in full conformance with the most modern testing requirements, Megger offers a family of high-quality insulation testers at voltages above 1 kV. At the core of high-voltage testing, our 5/10/15 kV units afford the highest level of quality testing along with prime safety, convenience and portability.

For complete insulation testing capability of all high-capital equipment, Megger goes one step further! The universal testing standard for rotational equipment, IEEE 43-2000, increased the test voltage recommendation to 10 kV for equipment rated 12 kV and above. Full compliance with this standard can be attained with just one tester, our 10 kV model.



MIT1525

The MIT1525 offers the ability to perform accurate insulation resistance measurements up to 15 kV test voltage with a maximum resistance of 30 TΩ. Resistance measurement accuracy is $\pm 5\%$ from 3 TΩ to 30 TΩ!

For utilities and service companies the MIT1525 is an all-around tester with its flexibility and future proofing capability. The Megger MIT1525 is designed to work wherever you work.

The **MIT515**, **MIT525**, and **MIT1025** are the ideal instruments for industrial plant maintenance, commissioning, and industrial/OEM use.

Typical applications include insulation testing of:

- Transformers
- Cables and Industrial/OEM testing
- Substation equipment
- Motors/Generators



INSULATION RESISTANCE TESTERS AVAILABLE



- 15 kV test voltage – increases test current, helping to avoid negative current when testing high resistance insulation
- CATIV 1000 V safety on all test terminals to 3000 m
- Rapid charge of capacitive loads such as HV power cables
- Always ready to test with Li-ion fast charge battery or from an ac source
- Designed to be durable and survive in the harshest of environments
- High noise immunity 6 mA
- High 3 mA short circuit current
- Download/stream results
- 2 year warranty

Electrical Test Equipment Catalog


All models are CATIV 600 V safety rated on **all** terminals and assembled in a rugged IP65 dual case. To ensure operation in electrically noisy environments, the units have a 3 mA noise filtering capability.

In order to quickly charge capacitive loads and cables the units not only have 3mA short circuit current but have "max power regulation technology" which provides faster charge times and ensures that correct voltage is maintained even at low load impedances.

Test results are easily identified with the date and time stamp function providing traceability. Saved test data can be easily transferred via a USB device interface to PowerDB Lite software included with the MIT525 and MIT1025.

All Megger 5/10 kV insulation testers are housed in a uniquely designed dual case that provides fire retardant protection without sacrificing ruggedness. They also include Megger's industry best guard terminal that provides a shunt circuit for parallel leakage paths in the test item. This allows one or more parallel current paths to be removed from the measurement, permitting a precise reading of the remaining path.

These highly reliable and low maintenance products reduce the cost of ownership. Their unrivalled practicality performs even the most rigorous testing.

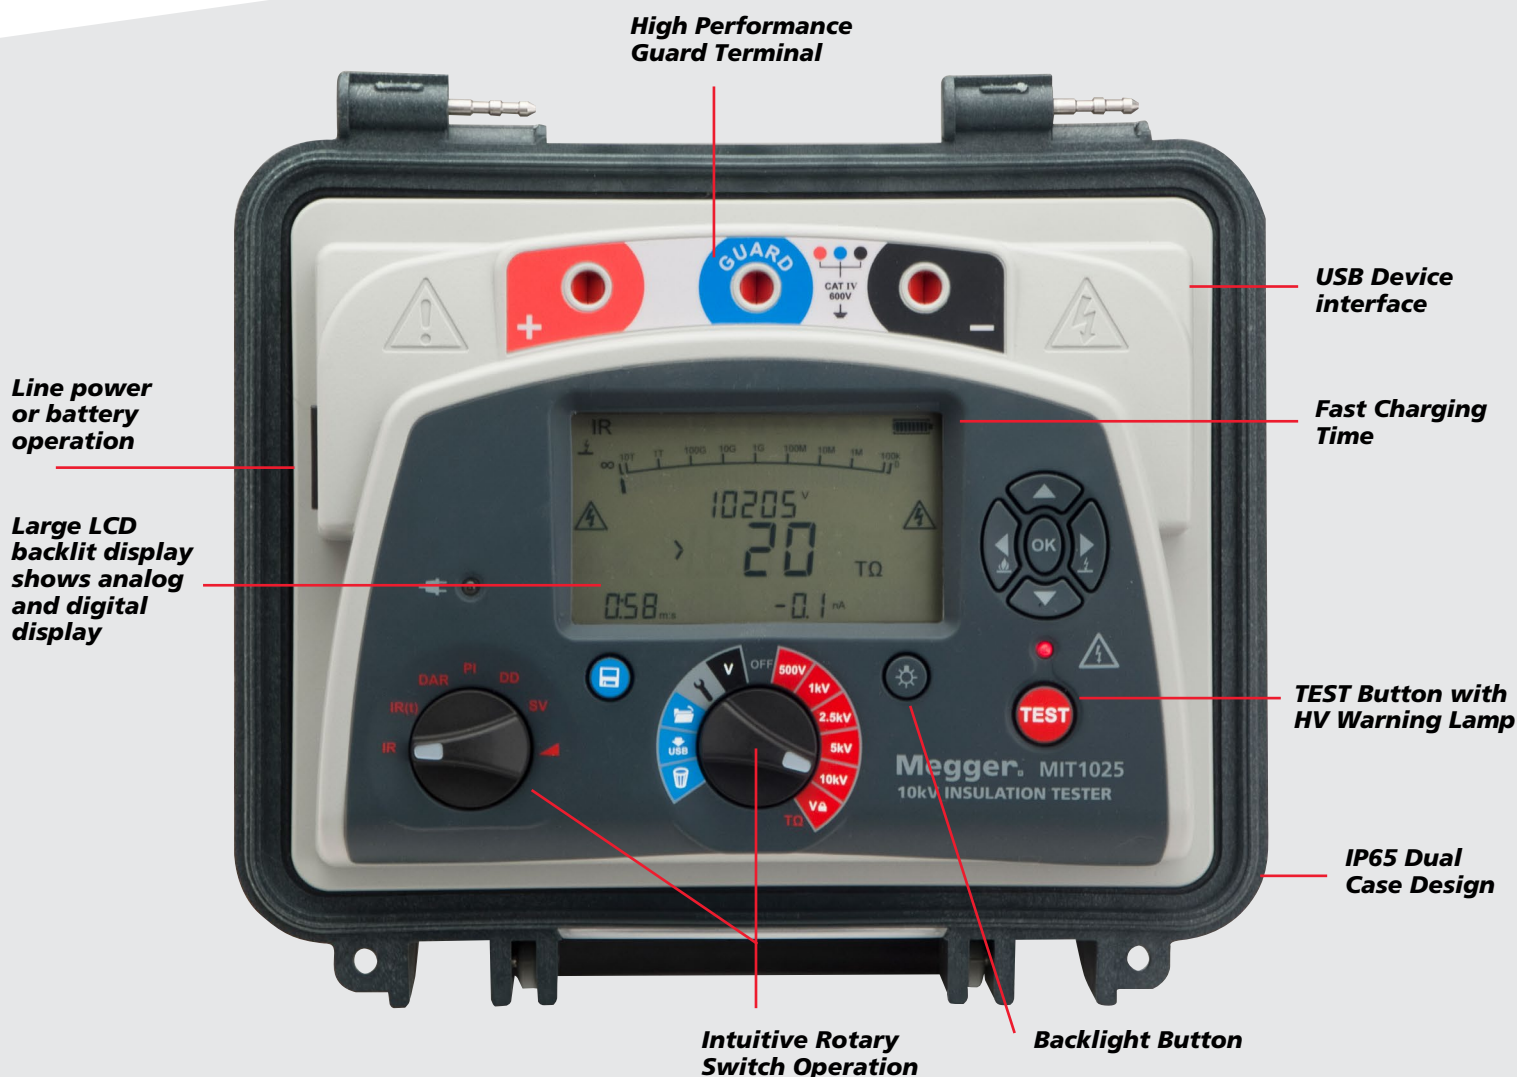


Electrical Test Equipment Catalog

ORDERING INFORMATION FOR 5/10/15-KV INSULATION TESTERS

Cat. No.	View Datasheet	Max Test Voltage	Max Reading	Download
MIT515	↓	5.0 kV	10 TΩ	NO
MIT525		5.0 kV	10 TΩ	YES
MIT1025		10.0 kV	20 TΩ	YES
MIT1525		15.0 kV	30 TΩ	YES



*Learn about available lead sets
for the 5/10/15 kV Insulation Testers
Download the brochure here:*



2.5 KV INSULATION TEST EQUIPMENT

The MIT2500 insulation and continuity tester has been designed for Electrical and Industrial test applications, where operation voltages exceed 1000 V and higher insulation test voltages are required.

The MIT2500 offers both fixed range voltages of 50 V, 100V, 250 V, 500 V, 1000 V and 2500 V, as well as a variable range that allows any voltage between 50 V and 2500 V to be "dialed in". This is supported by the test output voltage stabilization, which maintains the output test voltage to within 2% of the selected range, even when under test.



The MIT2500 includes Megger's industry best guard terminal that provides a shunt circuit for parallel leakage paths in the test item. This allows one or more parallel current paths to be removed from the measurement, permitting a precise reading of the remaining path.

All instruments are over-molded for increased protection and achieve an IP54 weatherproof rating.

MIT2500

- Insulation testing up to 2.5 kV and 200 GΩ range in a handheld instrument
- Guard terminal for high resistance accuracy
- Adjustable insulation test voltage from 50 V to 2500 V
- Stabilized insulation test voltage
- Rechargeable options for ac and car charging
- Single range, faster continuity testing from 0.01 Ω to 1 MΩ
- Polarization Index (PI) & Dielectric Absorption Ratio (DAR)
- CAT IV 600 V applications
- Optional magnetic strap available

ORDERING INFORMATION FOR MIT2500

Cat. No.	View Datasheet	Model	Description	Warranty (years)**
1004-745		MIT2500	2.5 kV Insulation Resistance Tester	3
1010-013			Optional Magnetic Strap	



** Extended warranty available for some products

Electrical Test Equipment Catalog

1-KV INSULATION TEST EQUIPMENT

Megger is the originator of insulation resistance testing and the world recognized leader in this area. The first instrument to perform such testing was introduced over 130 years ago. Based on valuable customer feedback and our many years of experience, we offer a

complete range of 1-kV insulation testers — the MIT200 Series, MIT300 Series and the MIT400/2 Series — designed to meet the varying needs and budgets of all types of customers.

MIT400/2 SERIES



- Insulation testing up to 1000 V and 200 GΩ range
- Stabilized insulation test voltage
- Single range, faster continuity testing from 0.01 Ω to 1 MΩ
- 600 V Trms ac and dc voltage measurement
- Live circuit detection and protection
- User variable insulation test voltage from 10V to 1000V, depending on model
- The digital display features an analog arc with pointer that provides both accuracy and charge/discharge characteristics.
- Test result storage and Bluetooth® downloading, depending on model
- Rechargeable options for ac and car charging, depending on model
- CAT IV 600 V & IP54
- Available magnetic strap

The MIT430/2 offers result storage, recall and Bluetooth downloading



Case and Leads included



Magnetic strap

ORDERING INFORMATION FOR MAGNETIC STRAP

Cat. No.	View Datasheet	Description
1010-013		Magnetic Strap

The MIT400/2 series insulation and continuity testers are designed not just for Electrical and Industrial, but with an exceptionally wide range of applications from electrical installations, cable testing, motor testing, automotive, ESD, panel building, avionics, maintenance, etc.

Insulation testing has been enhanced with feedback controlled test voltages to limit over-voltage to 2%, rather than the industry standard 10-20%.

A variable range allows any intermediate voltage from 10 V to 1000 V, where application-specific test voltages are required that do not appear in the standard ranges.

All models include test leads with probes and clips, SP5 remote switch probe (not included with MIT400/2) and a sturdy blow molded case. All instruments are over-molded for increased protection and achieve an IP54 weatherproof rating.

See ordering information on page 9.

ORDERING INFORMATION FOR MIT400/2 SERIES

Cat. No.	View Datasheet	Primary Market	Test Voltages	Max. Ω Reading	Download via Bluetooth®	Cal Certification	Warranty**
MIT400/2		Industrial	250, 500, 1000 V	50, 100, 200 GΩ	NO	YES	3 years
MIT410/2		Industrial	50, 100, 250, 500, 1000 V	10, 20, 50, 100, 200 GΩ	NO	YES	3 years
MIT420/2		Industrial	50, 100, 250, 500, 1000 V plus variable	10, 20, 50, 100, 200 GΩ	NO	YES	3 years
MIT430/2		Industrial	50, 100, 250, 500, 1000 V plus variable	10, 20, 50, 100, 200 GΩ	YES	YES	3 years
MIT410TC3		Telecom	50, 100, 250, 500 V	10, 20, 50, 100 GΩ	NO	YES	3 years
MIT481/2		Telecom	50, 100, 250, 500 V	10, 20, 50, 100 GΩ	NO	YES	3 years
MIT485/2		Telecom	50, 100, 250, 500 V plus variable	10, 20, 50, 100 GΩ	YES	YES	3 years

MIT300 SERIES



The MIT300 Series of insulation testers includes five models to meet the needs of electrical contractors. They incorporate features such as automatic discharge, audio-visual warnings, and test inhibition to ensure operator safety and protection from accidental misuse.

The MIT310 adds a voltmeter function. The MIT320 has a backlight, illuminated panel, kΩ range, limit alarm, and an adjustable continuity buzzer. The MIT330 can store up to 1000 test results.

The MIT300, MIT310, MIT320, and MIT330 feature an exclusive analog/digital display that clearly shows measurement results.

MIT200 SERIES







The MIT200 is one of the smallest insulation testers available on the market today. With four product options available, all the MIT200 instruments offer a range of safety and operation features expected from a Megger tester. The combined analog pointer and digital readout provide both accuracy and charge/discharge characteristics.

Voltage warning and display, plus voltage lockout protect both the user and the instrument, if accidentally connected to a live circuit. The MIT200 Series meet a wide range of international testing standards as well as BSEN 61557 and IEC61010.

** Extended warranty available for some products

Learn more about Insulation Testing under 1kV with our guide "A Stitch In Time"

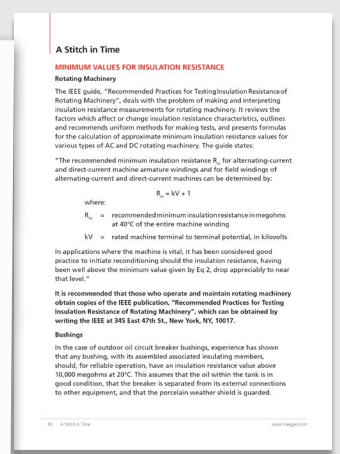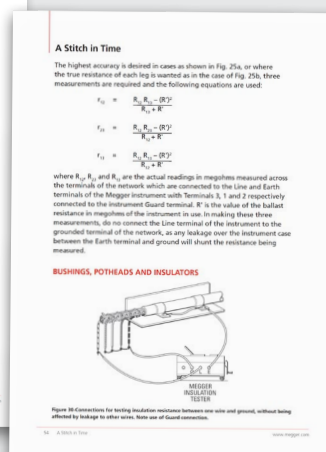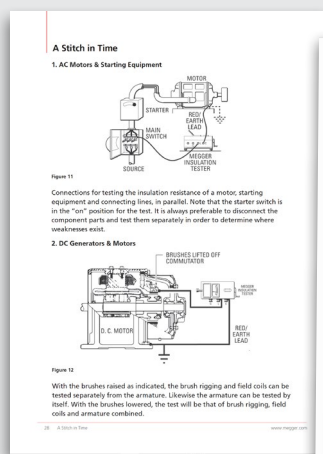

Electrical Test Equipment Catalog

ORDERING INFORMATION FOR MIT300 SERIES						
	Cat. No.	MIT300-EN	MIT310-EN	MIT320-EN	MIT330-EN	
View datasheet		↓				
Insulation testing	250 V	■	■	■	■	
	500 V	■	■	■	■	
	1000 V		■	■	■	
	Range to 999 MΩ	■	■	■	■	
	Insulation limit alarm (0.01 MΩ to 999 MΩ)			■	■	
Continuity testing	Continuity to 100Ω	■	■	■	■	
	Continuity buzzer	■	■	■	■	
	Lead null to 9Ω	■	■	■	■	
	Adjustable buzzer 1 to 20 Ω			■	■	
	Audible buzzer disable			■	■	
Resistance measurement	10 Ω to 1 MΩ range			■	■	
	0 Ω to 2 KΩ range					
General	Voltage warning	■				
	Default voltmeter		■	■	■	
	Backlit display			■	■	
	Backlight selector ranges			■	■	
	Locking test button	■	■	■	■	
	Auto power-down	■	■	■	■	
	Switched test probe			■	■	
	IP54 weatherproof	■	■	■	■	
	1000 test result storage				■	
	Downloading				■	
	Calibration certificate	■	■	■	■	
	Warranty (years)**		3	3	3	3

ORDERING INFORMATION FOR MIT200 SERIES					
	Cat. No.	MIT200-EN	MIT210-EN	MIT220-EN	MIT230-EN
View datasheet		↓			
Insulation testing	250 V			■	■
	500 V	■		■	■
	1000 V		■		■
	1000 MΩ range	■	■	■	■
	Auto-ranging	■	■	■	■
	Auto discharge	■	■	■	■
	Test inhibit	■	■	■	■
	Live circuit voltage display	■	■	■	■
	Continuity testing	Continuity @ >200 mA	■	■	■
Continuity to 0.01 Ω		■	■	■	■
Test lead null (9.99 Ω)		■	■	■	■
Automatic continuity test		■	■	■	■
Continuity buzzer with 5 Ω threshold		■	■	■	■
Default volts warning		■	■	■	■
General		Digital display + arc	■	■	■
	Battery condition	■	■	■	■
	Auto power down	■	■	■	■
	Tough carry case	■	■	■	■
	Test leads	■	■	■	■
	CATIII 600 V	■	■	■	■
	Warranty (years)**		3	3	3

** Extended warranty available for some products



Model MIT330



Model MIT230

Electrical Test Equipment Catalog

MAJOR MEGGER INSULATION RESISTANCE TESTERS

This specialty line of instruments has become synonymous over the years for fine craftsmanship, something you have come to expect from Megger. These instruments continue to be very popular today with a choice of three outstanding models.

ORDERING INFORMATION FOR MAJOR MEGGER MODELS							
	Cat. No	View Datasheet	Test Voltage (V dc)	Insulation Resistance	Resistance range	Power source	Warranty (Years)**
General Purpose	212159	↓	100, 250, 500, 1000	0 to 2000 MΩ	0 to 5000 Ω	Hand-cranked	1
	212359		100, 250, 500, 1000	0 to 2000 MΩ	0 to 5000 Ω	Line/Hand-cranked	1
High resistance	210170		100, 250, 500, 1000	0 to 20,000 MΩ	0 to 5000 Ω	Hand-cranked	1



General Purpose Model



High Resistance Model



Electrical Test Equipment Catalog

GROUND RESISTANCE TEST EQUIPMENT

Megger is the expert in ground resistance testing. From time saving clamp-on ground testers to speciality models for high sensitivity testing, we have the ground resistance tester to fit every application and budget.

The Megger line of ground resistance testers provides high accuracy, a broad testing range, and fast, reliable measurements. Megger ground testers are easy to use and lightweight.

The next few pages will outline the full line of ground testing equipment that Megger has to offer.

Our staff of professionals will help with your technical grounding questions and recommend the ground tester that best fits your need. Call us at 866-254-0962 or search the web at us.megger.com.



DET2/3



The DET2/3 is a robust and compact advanced earth/ground test instrument designed to measure Earth electrode resistance and soil resistivity. The DET2/3 is a tester for use on large or more complex earth/ground systems, which include power stations, substations, railways, communication systems, and difficult test environments.

With its powerful processor controlled system it provides a flexible and 'user-friendly' approach to earth tests by the provision of excellent error detection capabilities and full test information shown on a large color display. The DET2/3 can also provide a live trace of its measurements onscreen, which graphically shows the amount of changes and/or noise from the system under test - a powerful diagnostic tool for the ground testing professional.

See ordering information on next page.

Large color display that shows numeric and graphical results

Electrical Test Equipment Catalog





EARTH TESTING KITS

The Megger Earth Test Kit (ETK models) are designed to be as practical as possible. Housed in an ergonomically-designed bag, the kits are stored neatly, well protected and easy to transport. The test leads are fitted and retained on wheels for ease of use. Simply pull out the test lead from the ground testing instrument to the test point, clip the end directly into the spike, and test. When testing is complete, unclip the test leads and wind them in. The reels can be daisy chained, providing longer lengths in manageable extensions. The manageable extensions make reels lighter and easier to carry, helping to quickly resolve any connectivity issues.



ORDERING INFORMATION DET2/3 SERIES

	View Datasheet	Cat. No.	Description	Warranty
DET2/3		1008-949	DET 2/3 ground tester without leads	2
		1008-969	DET 2/3 ground tester plus lead kit - 50 m	2
		1008-989	DET 2/3 ground tester plus lead kit -100 m	2
ETK30		1010-176	98 ft. (30 m) cable and Spike kit	1
ETK50		1010-177	156 ft. (50 m) cable and spike kit	1
ETK100		1010-178	330 ft. (100 m) cable and spike kit	1
ETK50C		1010-179	156 ft. (50 m) cable, spike and clamp kit	1
ETK100C		1010-180	330 ft. (100 m) cable, spike and clamp kit	1

** Extended warranty available for some products

Electrical Test Equipment Catalog

DET3 CONTRACTOR SERIES




The DET3 Series of digital ground testing instruments from Megger is comprised of two models: an instrument for grounding and bonding tests and a unit that adds a current measuring function. With this added function, current on the ground rod can be measured for improved personnel safety and noise detection. The DET3TC includes the ART (Attached Rod Technique) method of testing, which greatly reduces testing time.

These Megger digital ground testers are powered by eight AA batteries which give excellent testing time — the status of the batteries is given by a bar graph on the LCD. The Megger DET3 Series earth/ground testers is designed to meet stringent safety standards and is rated CAT IV 100V.

Each DET3 comes complete with test leads, stakes, batteries, calibration certificate, and rugged polypropylene carry case.



ORDERING INFORMATION FOR DET3 SERIES		
	DET3TC	DET3TD
View datasheet	↓	↓
2-wire resistance	■	■
3-wire resistance	■	■
ART (attached rod technique) resistance measurement	■	
Resistance range	0.01 to 2000 2% ± 3d	0.01 to 2000 2% ± 3d
Ground voltage range	0 to 100 V	0 to 100 V
Ground current range (with optional current measuring clamp)	0.5 mA to 19.9 A	
Warranty (years)**	2	2

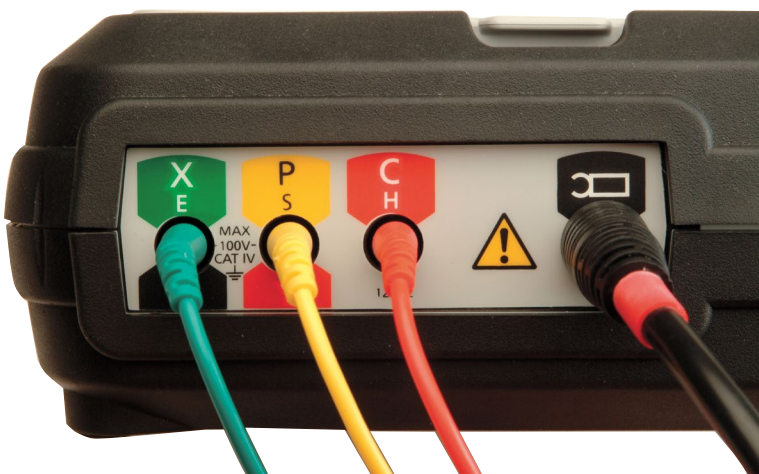

WHAT'S IN THE DET3T NAME?

DIGITAL EARTH TESTER 3 TERMINAL

- D** - Disposable Battery
- C** - Works with MCC1010 (optional)

DET3TC works with MCC1010 (not included)



** Extended warranty available for some products

Electrical Test Equipment Catalog



DET4T2 ENHANCED SERIES



These ground testers from Megger offer a comprehensive solution to ground resistance and soil resistivity testing needs. The instruments provide such functions as 2 pole, 3 pole, 4 pole, Attached Rod Technique (ART), stakeless, leakage current, and ground noise voltage measurements. All models now include selectable output voltage (25 V or 50 V). The DET4TC2 and DET4TCR2 offer four selectable test frequencies (94, 105, 111 and 128 Hz) for improved testing in noisy environments.

An optional MCC1010 augments the traditional fall-of-potential measurement method with ART, which allows electrode testing without disconnection and also leakage current measurement down to .5 mA. The MCV1010, a second optional clamp, enables true stakeless measurements to be made where driving a stake is not practical.

The DET4TC2 and DET4TD2 are powered by eight AA batteries which give excellent testing time. The DET4TR2 and DET4TCR2 are powered from rechargeable AA cells. For added convenience on all four units, the battery status is displayed using a bar graph.

The Megger DET4T2 Series earth/ground testers is designed to meet stringent safety standards and is rated CAT IV 100V.



WHAT'S IN THE DET4T NAME?

DIGITAL EARTH TESTER 4 TERMINAL

- R** - Rechargeable Battery
- D** - Disposable Battery
- C** - Works with Clamp
- 2** - Second generation

ORDERING INFORMATION FOR DET4T2 SERIES

Model No.	DET4TD2	DET4TR2	DET4TC2	DET4TC2 +Clamps	DET4TCR2	DET4TCR2 +Clamps
Cat. No.	1000-347	1000-324	1000-345	1000-365	1000-346	1000-366
View datasheet	↓					
Warranty (years)**	2					

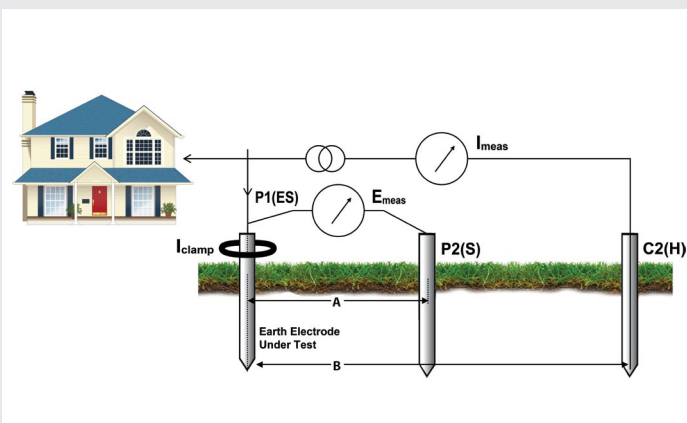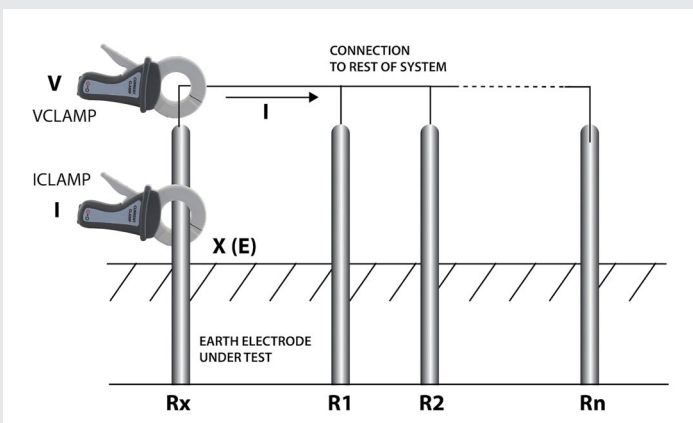

Schematic for two-clamp stakeless resistance measurement

The current I_{clamp} is the portion of I_{meas} which flows into the electrode-under-test. $I_{meas} - I_{clamp}$ flows into the rest of the connected Earthing system. Electrode resistance, $R = E_{meas} / I_{clamp}$

** Extended warranty available for some products

Electrical Test Equipment Catalog

DET14C AND DET24C CLAMP-ON EARTH/GROUND TESTERS



The DET14C and DET24C are advanced clamp-on ground testers used for measuring resistance of ground rods and associated installations. These instruments induce a test current into ground systems and measure ground resistance in multi-earth installations without the need to disconnect the electrical system. The technique effectively measures a loop resistance.

Hard-to-reach ground spikes are easily accessed with the instrument's short body length, a unique pre-test hold function, and display backlight for low light environments. The elliptical head shape greatly improves capacity enabling round cables up to 37 mm diameter and earth tapes (flat strip conductors) up to 50 mm wide to be clamped.

Good reliability is provided with smooth, flat core mating surfaces to prevent dirt build-up and ensure measuring integrity, and an extremely high battery life (24 hours continuous).

Both instruments feature date- and time-stamped test result storage reviewable on the large dual display. The DET24C offers a larger memory plus PC download capability.

- Elliptical clamp shape with 39 mm x 55 mm inner jaw dimensions
- Low maintenance flat jaw interface
- Excellent safety rating of CAT IV 600V
- Automatic noise current warning safety feature
- Resistance and current ranges - auto ranging
- Automatic noise filter function
- Backlit display
- DET24C includes Bluetooth® and PowerDB Lite software

These instruments are supplied in a hard carry case together with a calibration check loop, 4 x AA alkaline batteries, quick-start guide, and a full user guide on a CD. The DET24C is supplied with Bluetooth® and Power DB Lite software on CD.

These instruments cannot be used to test an isolated electrode.

SELECTION FOR DET14C AND DET24C

Model	Cat. No.	View datasheet	Memory capacity	Warranty (years)**
DET14C	1000-761	↓	256 records	1
DET24C	1007-331		2000 records downloadable via Bluetooth	1

** Extended warranty available for some products



Smooth mating jaw surface



Largest Jaw opening on the market



Elliptical Clamp Shape

MULTIFUNCTION TESTER



The MFT70 Multifunction Tester is designed for testing low voltage electrical installations to fulfill the requirements of NFPA70 and the National Electrical Code. It provides all the tests required to complete the necessary electrical certification for industrial, commercial and domestic fixed wiring installations, including:

- TRMS voltage and frequency measurement
- Insulation test at 100 V, 250 V, 500 V and 1000 V
- Continuity resistance at 200 mA or 15 mA
- Resistance range up to 100 kΩ
- GFCI test
- Phase rotation indicator
- Ground testing
 - 2-pole and 3-pole
 - Attached Rod Technique (ART)
 - Stakeless testing



ORDERING INFORMATION FOR MFT70

Model	Cat. No.	View datasheet	Description	Warranty (years)**
MFT70	1007-044		Multifunction Tester	1

SUBSTATION TEST EQUIPMENT

Megger makes a line of test equipment specifically designed to test and maintain a variety of critical electrical apparatus found in electric utility and industrial substations. Also, these instruments are rugged, field proven, and useful in the following markets:

- Airports
- Power Plants
- Government/Military
- Universities
- Mining

MPD SCAN SET DIS

Defects in medium and high voltage systems not only require costly repairs, but also can lead to failures of entire network sections with corresponding consequences. Therefore, it is in the interest of all network operators to recognize signs of impending defects as early as possible and to be able to take appropriate countermeasures on time.

With the PD Scan, Megger offers a lightweight, robust and portable PD scanner that can quickly inspect various type of equipment for partial discharge signals.

- For fast verification of partial discharge activity in MV and HV plants
- Universal application range, thanks to wide variety of sensors
- Integrated camera and QR code scanner
- Easy to use via keypad and touchscreen
- Reporting via MeggerBook RE software

The PD Scan Set DIS comes with the PD Scan main device, Parabolic receiver, HFCT SC40 sensor, function tester, charger + USB cable, Bluetooth® headphone, transport case, USB Stick with operating manual and reporting software



ORDERING INFORMATION FOR MPD SCAN

Cat. No.	View Datasheet	Description	Warranty (years)**
1012889		MPD Scan Set DIS	1

** Extended warranty available for some products

Electrical Test Equipment Catalog

SINGLE-PHASE, HAND-CRANK TTR

- Measures turns ratio and exciting current of windings in power, PTs, and CTs
- Used for testing single- and three-phase power and distribution transformers
- Applies 8 Vac with current up to 1 Amp



ORDERING INFORMATION FOR SINGLE-PHASE TTR

Cat. No.	View Datasheet	Description	Warranty (years)**
550005B		Single-phase, hand-crank Transformer Turns Ratio Test Set	1



MTO106 TRANSFORMER OHMMETER

The MTO106 is a portable, easy to use, line-operated instrument specifically designed for field measurement of winding resistance in distribution transformers, motor/generator windings, and other inductive test objects.

Some of the features of the MTO106 include:

- Safe discharge
- Adjustable output current up to 6 amps
- High compliance voltage (up to 48V) for fast charging of winding
- Continuous/always on operation and very short start-up time
- Two channels for simultaneous testing of dual windings
- Stable current

ORDERING INFORMATION FOR MTO106

Cat. No.	View Datasheet	Description	Warranty (years)**
BN-19090		MTO106 with test leads	1
BN-19000		MTO106 without test leads	1

** Extended warranty available for some products

LOW RESISTANCE OHMMETERS

Megger has been manufacturing low resistance ohmmeters for many decades. In fact, the first low resistance ohmmeter was launched in 1908. The first low resistance ohmmeter used a cross-coils meter movement.

Today, Megger has a comprehensive range of Low Resistance Ohmmeters, providing accurate and reliable measurements with test currents ranging from a few μA to 600 A, suitable for many applications.

DLRO2 / DLRO2X

Get fast, accurate, repeatable measurements - even in noisy environments - with the DLRO2 hand-held 2 Amp low resistance ohmmeter.

The DLRO2 can measure low resistance values across a wide range of applications, from railways and aircraft to industry components. If your applications require long test leads, then the DLRO2 can provide this without compromising test speed or safety. It has a dedicated long lead test to optimize the output, and this long test lead function is able to provide up to 1 A of test current into 4 ohms resistance. The DLRO2, with its optional cable reel test leads, is therefore ideal for testing wind turbine and avionic lightning protection applications.

- Noise Rejection mode with Confidence Meter™ (DLRO2X)
- Manual and auto save results for export to USB (DLRO2X)
- 'Difference Meter' for quick data comparisons
- Use very long test leads at 1 A using dedicated test mode
- Safely test the resistance of inductive loads at 1 A
- <600 V active protection against inadvertent live connections without blowing a fuse
- Ideal for outdoor use with protection against dust and moisture to IP54
- Industry standard safety rated at CAT III 600 V/CAT IV 300



ORDERING INFORMATION FOR DLRO2 / DLRO2X

Model	Cat. No.	View datasheet	Description	Warranty (years)**
DLRO2	1012-280	↓	2 Amp Handheld Ducter™ Low Resistance Tester	3
DLRO2X	1013-795		2 Amp Handheld Ducter™ Low Resistance Tester + data storage	3

KC-C LEADS

The new KC-C test leads are updated versions of the popular KC series test leads that are taking advantage of the long test lead mode on the DLRO2.



- Allows reliable measurement of lightning protection circuit resistance of wind turbines
- Lightweight design ideal for working at height
- Cable reels in two lengths: KC100C (328ft.) and KC50C (164ft.). 164ft. extension (KC50E) allows up to 656ft



ORDERING INFORMATION FOR KC-C LEADS

Cat. No.	View datasheet	Description
1013-211	↓	KC50C-KIT Kelvin clamp/probe reel - 165 ft. (50 m)
1013-212		KC100C-KIT Kelvin clamp/probe reel - 330 ft. (100 m)
1013-213		KC50E Extension reel - 165 ft. (50 m)

ORDERING INFORMATION FOR CABLE BAG

Cat. No.	Description
2012-180	Cable bag - backpack

** Extended warranty available for some products

DLRO-10



DLRO-10X

10 AMP MODELS

DLRO-10 AND DLRO-10X



The DLRO-10 and DLRO-10X are built into a strong, lightweight case that is equally suitable in the field or in the laboratory. Light enough to be worn around the neck, they are small enough to be taken into areas which were previously too small to access. The DLRO-10 uses a large, bright 4½-digit LED display, while the DLRO-10X has a large, backlit LCD.

The DLRO-10 displays the average of measurements achieved using forward and reverse current, while the DLRO-10X displays both individual measurements and the average. The DLRO-10X uses a menu system controlled by a two-axis paddle to allow the user to manually select the test current. The unit also adds real-time download of results and on-board storage for later download to a PC.

See ordering information on page 24.

See page 22 for a convenient accessory for the DLRO10 and DLRO10X.



DLRO10HD



Common with the DLRO10 series, the DLRO10HD features output power limiting to 0.25 W so as not to heat the test piece. However, the DLRO10HD has the additional benefit of combining this with two high-power*, high-compliance ranges. Benefits include the ability to use much longer test leads if required, plus the ability to heat and, therefore, identify circuit weakness. In addition, with the ability to maintain 10 A for at least a minute, this allows for improved testing of inductive loads.

The DLRO10HD is designed to operate in the harshest of conditions, surviving knocks, drops, dusty, and wet conditions. It can be used in the rain, and with the lid closed, is sealed to IP65. There is no need to worry about inadvertent connection to live supplies. High input protection shrugs it off without even blowing a fuse.

The DLRO10HD is battery powered, and is equally convenient at home running on a line supply, even while charging the battery. This means the instrument is at home in manufacturing environments, never having to wait for the battery to charge. The DLRO10HD is always ready to test.

*25 W

See page 25 for industrial application kit



DLRO10HDX



Augmenting Megger's DLRO10 and 10X range the DLRO10HDX combines ultimate simplicity of operation with a rugged IP65 case designed for stable ground and bench operation and provides memory storage and downloading.

- Onboard memory storage for test results up to 200 records
- Interchangeable test lead terminations

See page 25 for industrial application kit

Electrical Test Equipment Catalog

DLRO100 SERIES

The Megger DLRO100 series offers a unique range of 100 A digital low resistance testers. Features include CATIV 600V safety, operational IP54 ingress protection for dust and water, and a user replaceable, fast charge (2.5 hr) Li-Ion battery.

Providing low resistance measurements across a multitude of applications, including areas without access to line power, the DLRO100 is extremely flexible.

Applications include:

- Switchgear
- Circuit breaker
- Contact resistance
- Bus bar and cable joints
- Wire and cable resistance
- Lightning conductor bonding
- Welded joints
- Ground connections and joints

The DLRO100 range offers unique features including DualGround™ testing, adjustable current ramping, high noise immunity, high power 100A continuous testing, and remote control, yet is small and lightweight.

There are three models in the series. All three models can be line powered, are rated CAT IV 600 V, and can test with currents from 10 to 110 A. "B" in the model name indicates the battery powered option (in addition to ac power).

NOTE: The DLRO100 Units are not supplied with leads.




- **DLRO100 EB** - The base model. B in the model name indicates the battery powered option.
- **DLRO100 XB** - This model includes all features in the basic model, with added data storage and DualGround™ testing capability.
- **DLRO100 HB** - The top-of-the-line model includes features in the EB and XB models, with asset tagging (enter unique asset ID's using the DLRO100 Asset Tag Windows app), Bluetooth® download and USB remote operation.



A terminal adapter has been designed to enable the use of user's own test leads.

See ordering information on page 24.

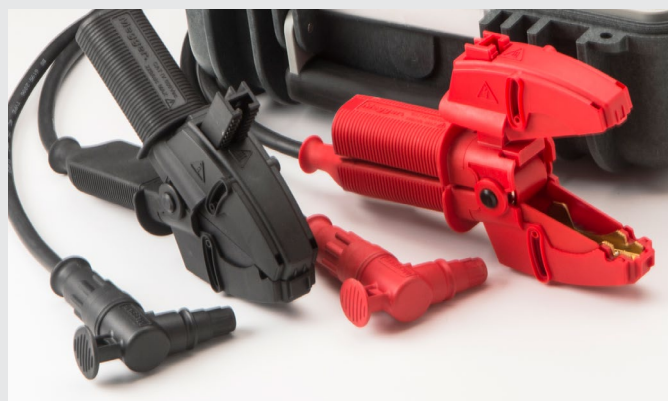

A tough adjustable clamp has been designed to ensure flexibility in many applications and provides a good connection with the test piece.

Electrical Test Equipment Catalog

OPTIONAL ACCESSORY

DLRO10LPU LINE POWER UNIT

The DLRO10 and DLRO10X can now be powered from a mains / line power supply.


The DLRO10LPU unit is simply fitted to the instrument in place of the standard battery pack.

When in use a red LED is illuminated when the instrument is powered from a mains/line power supply.

**This option also works with the BITE3. See page 42.*



ORDERING INFORMATION FOR LINE POWER UNIT

Cat. No	View datasheet	Item
1003-171		DLRO10LPU-US Mains power attachment - US plug

DLRO200, DLRO200-NLS, DLRO200-115 AND DLRO200-115-NLS

- Small and weighs less than 33 lbs
- Test currents from 10 A to 200 A dc
- 0.1 $\mu\Omega$ best resolution
- On board memory for up to 300 test results and notes
- RS232 port to download stored results or for real time output to a printer
- Supplied with download software
- Models DLRO200-EN and DLRO200-115 come complete with 5m test leads



See ordering information on page 24.

** Extended warranty available for some products



GENERAL PURPOSE DLROS (247000 SERIES)

Three models designed for general purpose testing applications. All units in this family feature digital readout, offer a resolution to 1 $\mu\Omega$ or better, and have a basic accuracy of $\pm 0.25\%$.

Dual-Pak DLRO (Cat. No. 247000)

- Separate measuring and charging modules
- Weighs less than 8 lbs (3.6 kg)
- Rechargeable battery with separate charger for hours of testing

Single-Pak DLRO (Cat. No. 247001)

- Measuring circuits, rechargeable batteries, and charger in one self-contained unit
- Housed in a tough case with hinged, removable lid and carrying handle
- Includes captive wing nuts

Please note: These units do not include test leads

See ordering information on page 24.



General Purpose Model (247001)

MOM2 HANDHELD MICRO-OHMMETER

- Up to 220 A
- Battery powered
- Lightweight – 1 kg
- Safe test – DualGround™
- Auto range: 1 $\mu\Omega$ to 1000 m Ω
- Bluetooth® PC communication
- Complies with IEEE and IEC standards

The MOM2 Micro-ohmmeter is a lightweight, handheld unit designed to deliver up to 220 Amps and measure the resistance of circuit breaker contacts, bus-bar joints, and other high-current links.



ORDERING INFORMATION FOR MOM2

Cat. No.	MOM2 + Clamps (BD-59092)	MOM2 + Probes (BD-59090)
View datasheet		
Warranty (years)**	1	1

** Extended warranty available for some products

Electrical Test Equipment Catalog

ORDERING INFORMATION FOR LOW RESISTANCE OHMMETERS

Cat. No	View datasheet	Output Current	Onboard Memory Storage	Power Source	No Leads Set supplied	Duplex/ Hand Spikes	Kelvin Clips	Current and Potential Leads	Warranty (years)**
DLRO100EB (1004-879)	↓	10, 100 amp, Additional Smoothing		Rechargeble Battery/ Line Power	■				2
DLRO100XB (1004-919)		10, 100 amp, Additional Smoothing	■	Rechargeble Battery/ Line Power	■				2
DLRO100HB (1004-959)		10, 100 amp, Additional Smoothing	■	Rechargeble Battery/ Line Power	■				2
DLRO10HD + DH4C (1006-603)	↓	10 amp		Rechargeble Battery/ Line Power		■			2
DLRO10HD + KC1 (1006-604)		10 amp		Rechargeble Battery/ Line Power			■		2
DLRO10HD-NLS (1006-657)		10 amp		Rechargeble Battery/ Line Power	■				2
DLRO10HDX -NLS (1008-052)		10 amp	■	Rechargeble Battery/ Line Power	■				2
DLRO10HDX + DH4C (1008-075)		10 amp	■	Rechargeble Battery/ Line Power		■			2
DLRO10HDX + KC1 (1008-095)		10 amp	■	Rechargeble Battery/ Line Power			■		2
DLRO10 (1006-598)		10 amp		Rechargeble Battery		■			2
DLRO10-NLS (1006-660)	↓	10 amp		Rechargeble Battery	■				2
DLRO-10X (1006-600)		10 amp	■	Rechargeble Battery		■			2
DLRO-10X-NLS (1006-659)		10 amp	■	Rechargeble Battery	■				2
247000		10 amp		Rechargeble Battery	■				1
247001	↓	10 amp		Rechargeble Battery	■				1
247002		10 amp		Rechargeble Battery	■				2
DLRO200-US (1012-782)	↓	10, 100, 200 amp,	■	Line Power				■	2
DLRO200-US-NLS (1012-783)		10, 100, 200 amp,	■	Line Power	■				2
DLRO200-115		10, 100, 200 amp, Additional Smoothing	■	Line Power				■	2
DLRO200-115-NLS (1000-565)		10, 100, 200 amp, Additional Smoothing	■	Line Power	■				2

** Extended warranty available for some products



100A KELVIN CLAMPS


The 100A Kelvin Clamp is designed for use with a variety of electrical test instruments. Connect to a multimeter using safety banana leads and built-in banana posts, or upgrade hard-wired lead sets by removing the dust cover to expose a 100A dc stud and flying potential lead.

The expandable metal jaw provides unparalleled versatility, allowing for connection to any size test specimen. With a Limited Lifetime Warranty, this shatterproof clamp is built to last!

- 3" / 75mm Jaw Opening
- 33A Safety Banana Postsⁱ
- 100A dc continuous
- 200A dc w/duty cycleⁱⁱ
- 15kV/500mA ac
- Two Clamps = 4 Wire Kelvin
- -40°C to 40°C operating temperature
- Shatterproof plastic
- Limited Lifetime Warranty

ⁱ Requires compatible hardware

ⁱⁱ 3/30 min on/off

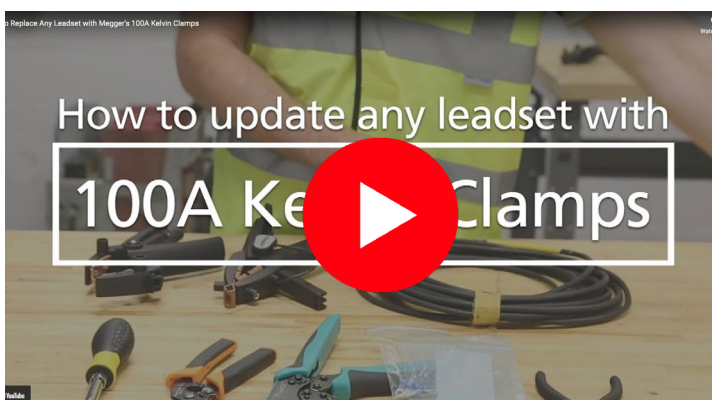

ORDERING INFORMATION FOR 100A KELVIN CLAMPS

Item	Cat. No.	View datasheet
Red	100A-KC-R	
Black	100A-KC-BLK	
Yellow	100A-KC-Y	
Blue	100A-KC-BLU	
White	100A-KC-W	
Green	100A-KC-G	



DLRO10HD AND DLRO10HDX CATIII 300V INDUSTRIAL APPLICATION KIT

- Connect 4mm shrouded plugs to the DLRO10HD and DLRO10HDX
- Ideal for testing in industrial locations
- Maintains instruments CATIII 300V rating of instruments
- Kelvin probe and clip lead sets supplied
- Bridging lead set supplied for accurately measuring cable resistance

ORDERING INFORMATION FOR INDUSTRIAL APPLICATION KIT

Cat. No.	Description
1011-376	Industrial Application Kit

Replacement parts available upon request

Electrical Test Equipment Catalog

DLRO LEADS

Megger DLROs require test leads, two potential and two current, to make low-resistance measurements. In addition to individual current and potential lead sets, duplex leads that combine current and potential connections in one set are offered. A variety of C-clamps, Kelvin clips, fixed point, and helical spring-point leads are available in various lengths.

DUPLEX CONNECT TEST LEADS

Cat. No.	View datasheet	Description	Length	
1006-442	↓	Connect Duplex Handspike lead set 3m (x2) for BT51	10 ft. (3 m)	
1006-443		Connect Duplex Handspike lead set 6m (x1) for BT51	20 ft. (6 m)	
1006-444		Duplex hand spikes	4 ft. (1.2 m)	
1006-445			8 ft. (2.5 m)	
1006-446			4 ft. (1.2 m)	
1006-456		Connect test leads with indicator light	5 ft. (1.5 m)	
1006-458			10 ft (3 m)	
1006-459			20 ft. (6 m)	
1006-452		Connect test lead without indicator light	5 ft. (1.5 m)	
1006-454			10 ft (3 m)	
1006-455			20 ft. (6 m)	
1007-023		↓	Connect test leads for BT51	10 ft (3 m)
1007-024			20 ft. (6 m)	
1006-460		Connect extension lead	20 ft. (6 m)	
1006-450		Duplex connect probe	Probe	
1006-449		Duplex connect twist probe	Probe	
1006-448		Concentric duplex connect probe	Probe	
1006-447		Heavy duty kelvin clip	Clip	
1006-451		Insulated connect Kelvin Clip	Clip	
1006-462		Connect kelvin lead set (x2)	10 ft (3 m)	
1006-461	Connect insulated kelvin clip lead set (x2)	10 ft (3 m)		



Wind Turbine Lightning Protection Test Lead Set

Specially designed for measuring resistance of lightning protection circuit between wind turbine blade tip to ground.

DUPLEX TEST LEADS

Cat. No.	View datasheet	Termination	Length	Current
242011-7	↓	Helical hand spikes with spring points	7 ft. (2 m)	10 A
242011-18			18 ft. (5.5 m)	10 A
242011-30			30 ft. (9 m)	10 A
242009-18		Helical hand spikes w/ spring points and current push-button switch	18 ft. (5.5 m)	10 A
242002-7		heavy-duty, fixed-point hand spikes	7 ft. (2 m)	10 A
242002-18			18 ft. (5.5 m)	10 A
242002-30			30 ft. (9 m)	10 A
242003-7		Replaceable needle points	7 ft. (2 m)	10 A
242004-7		Heavy-duty C-clamps	7 ft. (2 m)	10 A
242004-18			18 ft. (5.5 m)	10 A
242004-30			30 ft. (9 m)	10 A
241005-7		0.5 in. (1.3 cm) Kelvin clips - Gold plated	7 ft. (2 m)	10 A
242005-7		0.5 in. (1.3 cm) Kelvin clips - Silver plated	7 ft. (2 m)	10 A
242006-7		1.5 in. (4 cm) Kelvin clips	7 ft. (2 m)	10 A
242006-18			18 ft. (5.5 m)	10 A
242006-30			30 ft. (9 m)	10 A
1008-028		Current lead with HD clips and separate potential leads with clips	16 ft. (5 m)	600 A
6220-756			33 ft. (10 m)	600 A
6220-757			49 ft. (15 m)	600 A
1008-029			16 ft. (5 m)	200 A

DLRO100 TEST LEADS

Cat. No.	View datasheet	Termination	Length	Current
1004-448	↓	DLRO100 CAT IV Lead Set	16 ft. (5 m)	100 A
1004-449			33 ft. (10 m)	100 A
1004-450			49 ft. (15 m)	100 A
1005-634		DLRO100 CAT IV Kelvin Lead Set	16 ft. (5 m)	100 A
1005-635			33 ft. (10 m)	100 A
1005-636			49 ft. (15 m)	100 A
1005-555			DLRO100 Terminal adapters (x2)	N/A

INDIVIDUAL TEST LEADS

Cat. No.	View datasheet	Type	Termination	Length	Current
242021-7	↓	Potential	Hand Spikes	7 ft. (2 m)	N/A
242021-18				18 ft. (5.5 m)	
242021-30				30 ft. (9 m)	
242041-7		Current	Terminal Clips	7 ft. (2 m)	10 A
242041-18				18 ft. (5.5 m)	
242041-30				30 ft. (9 m)	

WIND TURBINE LIGHTNING KITS

Cat. No.	View Datasheet	Description
1001-249	↓	KC60 Kelvin lead kit - 200 ft. (60 m)
1001-248		KC30 Kelvin lead kit - 100 ft. (30 m)
1013-211		KC50C-KIT Kelvin clamp/probe reel - 165 ft. (50 m)
1013-212		KC100C-KIT Kelvin clamp/probe reel - 330 ft. (100 m)
1013-213		KC50E Extension reel - 165 ft. (50 m)

MEGGER RENEWABLE ENERGY PRODUCTS

Wind and solar power are the modern groundbreakers of the electric power industry. The future is nowhere but up as these technologies develop and mature. In the excitement of the benefits and rewards to be gained from these new technologies it is easy to overlook fundamentals. They're still part of the power grid...albeit unique. They still must be installed properly and maintained diligently. Don't be caught with trying to adapt generic tools to special adaptations. This can waste time and lead to approximations in place of proofs. Megger has taken the high ground with cutting-edge products specifically designed for the unique requirements of wind and solar, including more current, higher voltage, specialized leads, plus added safety, convenience, and portability for the especially demanding environments of renewables tester.





Products for Solar Applications

Combiner Boxes & Inverters

The frequency and quality of the electrical power from Inverters must meet set requirements to connect with the wider grid without causing faults. Megger offers a variety of products for this application



DPM1000 POWER CLAMP METER

- dc and ac current up to 1000 A
- True RMS measurement for greater accuracy
- Large jaw size safely assists with uninsulated conductor measurements
- 1000 Vac and 1000 Vdc
- Resistance, continuity, frequency, phase rotation, capacitance, in-rush current, power factor, wattage, harmonics, diode test, temperature.
- Peak, min/max and data-hold functions

ORDERING INFORMATION DPM1000

Cat. No.	View Datasheet	Measurement Range	Warranty (years)**
DPM1000	↓	1000 A ac/dc	1



DLRO10HDX - LOW RESISTANCE OHMMETER

Augmenting Megger's DLRO10 and 10X range, the DLRO10HDX combines ultimate simplicity of operation with a rugged IP65 case designed for stable ground and bench operation and provides memory storage.

- Onboard memory storage for test results up to 200 records
- Interchangeable test lead terminations

ORDERING INFORMATION FOR DLRO10HDX

Cat. No.	View Datasheet	Description	Warranty (years)**
1008-052	↓	DLRO10HDX Low Resistance Ohmmeter	1



MPQ1000 - POWER QUALITY ANALYZER

- Automatic CT recognition
- Automatic connection verification
- On-board data analysis
- SD card and USB stick support
- 1000 V ac and 1000 V dc range
- Scope and DMM modes
- CATIV @ 600 V
- IEC61000-4-30 Class A compliant

ORDERING INFORMATION FOR MPQ1000

Cat. No.	View Datasheet	Warranty (years)**
MPQ1000 - Basic	↓	1
MPQ1000 - Silver		1
MPQ1000 - Silver Plus		1
MPQ1000 - Gold		1
MPQ1000 - Gold Plus		1
MPQ1000 - Platinum		1
MPQ1000 - Platinum Plus		1

** Extended warranty available for some products

MIT2500 - 2.5KV INSULATION & CONTINUITY TESTER



- Insulation testing up to 2.5 kV and 200 GΩ range in a handheld instrument
- Guard terminal for high resistance accuracy
- Adjustable insulation test voltage from 50 V to 2500 V
- Stabilized insulation test voltage
- Rechargeable options for ac and car charging
- Single range, faster continuity testing from 0.01 Ω to 1 MΩ
- Polarization Index (PI) & Dielectric Absorption Ratio (DAR)
- CAT IV 600 V applications



ORDERING INFORMATION FOR MIT2500

Cat. No.	View Datasheet	Description	Warranty (years)**
1004-745	↓	2.5 kV Insulation Resistance Tester	1

MIT1025 - 10KV INSULATION RESISTANCE TESTERS



- Measures up to 20 TΩ
- PI, DAR, DD, SV and ramp test
- Improved productivity – operate from line power/mains if battery dead
- Li ion battery - extended capacity, rapid charge
- Advanced memory with time/date stamp
- CATIV 600 V safety rating

ORDERING INFORMATION FOR MIT1025

Cat. No.	View Datasheet	Description	Warranty (years)**
1004-745	↓	2.5 kV Insulation Resistance Tester	1





Products for Solar Applications

Control Panels, Busbars & Contact Connections

There are multiple electrical panels with thousands of contacts and connectors in a large Solar PV site. These panels must be tested at commissioning, as well as periodically tested as part of a maintenance and fault-finding program



DLRO10HDX

Augmenting Megger's DLRO10 and 10X range, the DLRO10HDX combines ultimate simplicity of operation with a rugged IP65 case designed for stable ground and bench operation and provides memory storage.

- Onboard memory storage for test results up to 200 records
- Interchangeable test lead terminations

ORDERING INFORMATION FOR DLRO10HDX

Cat. No.	View Datasheet	Description	Warranty (years)**
1008-052	↓	DLRO10HDX Low Resistance Ohmmeter	1



MIT525 - 5 KV DIAGNOSTIC INSULATION RESISTANCE TESTER

- Measures up to 10 TΩ
- PI, DAR, DD, SV and ramp test
- Improved productivity – operate from line power/mains if battery dead
- Li ion battery - extended capacity, rapid charge
- Advanced memory with time/date stamp
- CATIV 600 V safety rating

ORDERING INFORMATION FOR MIT525

Cat. No.	View Datasheet	Description	Warranty (years)**
1001-940	↓	2.5 kV Insulation Resistance Tester	1



DLRO200 - 200A MICRO-OHMMETER

- Test currents from 10 A to 200 A dc
- 0.1 μΩ best resolution
- On board memory for up to 300 test results and notes
- RS232 port to download stored results or for real time output to a printer
- Supplied with download software

ORDERING INFORMATION FOR DLRO200

Cat. No.	View Datasheet	Description	Warranty (years)**
1012-782	↓	200A Micro-ohmmeter	1

** Extended warranty available for some products



MIT2500 - 2.5KV INSULATION & CONTINUITY TESTER

- Insulation testing up to 2.5 kV and 200 GΩ range in a handheld instrument
- Guard terminal for high resistance accuracy
- Adjustable insulation test voltage from 50 V to 2500 V
- Stabilized insulation test voltage
- Rechargeable options for ac and car charging
- Single range, faster continuity testing from 0.01 Ω to 1 MΩ
- Polarization Index (PI) & Dielectric Absorption Ratio (DAR)
- CAT IV 600 V applications

ORDERING INFORMATION FOR MIT2500

Cat. No.	View Datasheet	Description	Warranty (years)**
1004-745	↓	2.5 kV Insulation Resistance Tester	1



DCM1500S 1500 A SOLAR CLAMP METER

- Auto ranging
- ac 1000V / dc 2000V
- ac/dc 1500A capability
- Smart HOLD
- MIN/MAX
- Bluetooth connection to Megger Link app
- CAT IV 600V / CAT III 1000V Safety Standards
- PV test leads with MC4PV plugs

ORDERING INFORMATION FOR DCM1500S

Cat. No.	View Datasheet	Description	Warranty (years)**
1013-357	↓	DCM1500S Solar PV Clamp Meter	1



MET1000 ALL-IN-ONE TRUE RMS ELECTRICAL TESTER

- LED and LCD display with self-test
- Detachable test probes
- ac/dc voltage to 1000 V
- 200 A ac measurement
- True RMS on ACV/ACA
- Measures voltage without batteries

ORDERING INFORMATION FOR MET1000

Cat. No.	View Datasheet	Description	Warranty (years)**
1013-099	↓	MET1000 All-in-one True RMS Electrical Tester	1

** Extended warranty available for some products



Products for Solar Applications

Batteries

There are backup batteries, which have the role of providing power to critical systems during fault conditions. These are essential safety devices and must be tested at commissioning and during regular maintenance work.



BITE5

- Supports battery discharge testing
- Measures impedance on cells up to 200V
- Supports lead acid, NiCad and Li-Ion
- Measures DC voltages up to 1000V
- Measures AC voltages up to 600V
- Touchscreen set-up and trending
- USB and micro SD card
- Measures AC and DC current

ORDERING INFORMATION FOR BITE5

Cat. No.	View Datasheet	Description	Warranty (years)**
BITE5	↓	Battery Tester	1



BITE2P

BITE2

BITE2 AND BITE2P

- Determines condition of lead-acid and NiCd cells up to 7000 Ah
- On-board Pass/Warning/Fail indications
- On-line testing

ORDERING INFORMATION FOR BITE2 AND BITE2P

Cat. No.	View Datasheet	Description	Warranty (years)**
BITE2	↓	Battery Impedance Test Equipment	1
BITE2P		Battery Impedance Test Equipment with built-in printer	1





Products for Solar Applications

Lightning Protection System

A good Lightning Protection System is essential for reliability



DLRO2 / DLRO2X

- Noise Rejection mode with Confidence Meter™ (DLRO2X)
- Manual and auto save results for export to USB (DLRO2X)
- 'Difference Meter' for quick data comparisons
- Use very long test leads at 1 A using dedicated test mode
- Safely test the resistance of inductive loads at 1 A
- <600 V active protection against inadvertent live connections without blowing a fuse
- Ideal for outdoor use with protection against dust and moisture to IP54
- Industry standard safety rated at CAT III 600 V/CAT IV 300

ORDERING INFORMATION FOR DLRO2

Model	Cat. No.	View datasheet	Description	Warranty (years)**
DLRO2	1012-280	↓	2 Amp Handheld Ducter™ Low Resistance Tester	3
DLRO2X	1013-795		2 Amp Handheld Ducter™ Low Resistance Tester with data storage	3



DLRO10HDX

- Onboard memory storage for test results up to 200 records
- Download to PowerDB
- Interchangeable test lead terminations
- High or low output power selection for condition diagnosis
- Battery or AC mains supply
- Protected to 600 V without blowing a fuse, test lead live voltage warning light
- Heavy duty case: IP 65 lid closed, IP54 operational
- Printer output and memory

ORDERING INFORMATION FOR DLRO10HDX

Cat. No.	View Datasheet	Description	Warranty (years)**
1008-052	↓	DLRO10HDX Low Resistance Ohmmeter	1



DLRO10X

- Accurate results in under three seconds
- Auto current reversal cancels standing emfs
- Fuse protected to 600 V
- NiMH battery reduces weight
- 250 mW power limit (with optional override) to avoid heating the test sample
- Automatically detects continuity in potential and current connections
- Visible warning of high voltages present at the terminals
- Visible warning of current flowing in the test sample
- Alpha-numeric keypad for entering test notes
- User setable high and low limits
- Autoranging with Manual option

ORDERING INFORMATION FOR DLRO10X

Cat. No.	View Datasheet	Description	Warranty (years)**
1006-659	↓	DLRO10X Low Resistance Ohmmeter	1



Products for Solar Applications

Foundation Grounding

Each Solar string has its own ground/Earth system which is interconnected with all the other systems of the site. This creates a very large interconnected ground system, which is tricky to test



DET2/3 - HIGH RESOLUTION EARTH TESTER

- High resolution of 1 mΩ, ideal for large earth (ground) systems
- Versatile tests modes
- High accuracy for earth (ground) electrode grid and soil resistivity tests
- Rechargeable battery power that can last all day with a fast re-charge (up to 10 hours)
- Robust instrument with IP65 protection
- Automatic test frequency selection, with filters and high current features
- Diagnostic trace display
- Data storage
- Large color display that shows numeric and graphical results

ORDERING INFORMATION FOR DET2/3

Cat. No.	View Datasheet	Description	Warranty (years)**
1008-949	↓	DET 2/3 ground tester without leads	1
1008-969		DET 2/3 ground tester plus lead kit - 50 m	1
1008-989		DET 2/3 ground tester plus lead kit -100 m	1



DET14C / DET24C - GROUND RESISTANCE CLAMP TESTERS

- Elliptical clamp shape improves access to earth cables and straps up to 50 mm
- Low maintenance flat jaw interface
- Measures ground resistance from 0.05 Ω to 1500 Ω
- Measures true RMS ground leakage current from 0.5 mA rms to 35 A rms
- CAT IV 600 V safety rating
- Backlit LCD display

ORDERING INFORMATION FOR DET14/24C

Cat. No.	View Datasheet	Description	Warranty (years)**
1000-761	↓	256 records	1
1007-331		2000 records downloadable via Bluetooth	1



Products for Solar Applications

Available Solar Kits



PVK320 AND PVK330 PHOTOVOLTAIC KITS

- Choice of multimeter/clampmeter options for verifying solar panels
- Data hold allows easy measurements
- Single button operation
- Automatic on/off for prolonged battery life
- Compact instruments fit in pocket for easy carrying

The Megger PVK kits offer the photovoltaic engineer / electrician two choices of included test instruments for verifying a photovoltaic installation.

The PVK320 kit features the Megger PVM210 irradiance meter combined with the Megger AVO410 CATIV multimeter, while the PVK330 kit features the PVM210 with the DCM340 ac/dc clampmeter.

Both kits have a combined PV test lead / adapter set for MC3 and MC4 connection to solar panels. Also included is a zipped pouch for storing each kit.

The PV test leads, included with both kits, feature a set of red and black test leads with 4mm instrument plugs at one end, terminated with MC4 solar connectors at the other end.

The included adapter leads have MC4 connectors at one end with MC3 connectors at the other end. Ratings of the leads are 19A 1000V.

Both kits have a zipped pouch to store the instruments and leads.

ORDERING INFORMATION FOR PVK320 AND PVK330

Cat. No.	View Datasheet	Description	Warranty (years)**
1002-550	↓	PVK320	1
1002-551	↓	PVK330	1
1002-549		PV Test leads	1





Products for Solar Applications

Solar Accessories



TC3231 - THERMAL CAMERA

The TC3231 combines the convenience of an infrared thermometer with the visual advantage of a thermal imager, which provides a troubleshooting camera with an infrared heat map. The unit offers a professional infrared 32 x 31 pixels image thermometer with a 2.2 in. color TFT LCD. It covers a wide range of surface temperature measurements.

The TC3231 features a range of thermal image display color palette options and high/low user preset temperature alarms. The user can also set the background temperature.

Additionally, the TC3231 is the ideal accessory for the MIT5/10/15 kV insulation testers, MPQ1000, and MTR105.



Megger

ORDERING INFORMATION FOR TC3231

Cat. No.	View Datasheet	Description	Warranty (years)**
1012-514		TC3231 Thermal Camera	1



PVM210 IRRADIANCE METER

The Megger PVM210 has been designed to provide the solar / photovoltaic engineer a compact, pocket size instrument that is easy to use. Single-handed operation is possible due to the solar detector and meter being housed in one neat unit. This feature is ideal when using the instrument on a sloping roof or when working at the top of a ladder.

- Optimal incident angle and positioning of solar panels
- Measurement of solar power for panel short circuit calculation
- 3-3/4 digit LCD display with 1999 W/m² range
- Single-handed use
- Pocket sized for easy carrying
- Standard camera mount fixing for accurate placement



Megger

ORDERING INFORMATION FOR PVM210

Cat. No.	View Datasheet	Description	Warranty (years)**
1002-548		PVM210 Irradiance meter; 1999 W/m ²	1

** Extended warranty available for some products

Products for Wind Power Applications



Frequency Converters & Power Quality

The frequency and general quality of the electrical energy from Wind Turbines must meet set requirements in order to seamlessly integrate with the wider grid



DPM1000 POWER CLAMP METER

- dc and ac current up to 1000 A
- True RMS measurement for greater accuracy
- Large jaw size safely assists with uninsulated conductor measurements
- 1000 Vac and 1000 Vdc
- Resistance, continuity, frequency, phase rotation, capacitance, in-rush current, power factor, wattage, harmonics, diode test, temperature.
- Peak, min/max and data-hold functions

ORDERING INFORMATION DPM1000			
Cat. No.	View Datasheet	Measurement Range	Warranty (years)**
DPM1000	↓	1000 A ac/dc	1



MPQ1000 - POWER QUALITY ANALYZER

- Automatic CT recognition
- Automatic connection verification
- On-board data analysis
- SD card and USB stick support
- 1000 V ac and 1000 V dc range
- Scope and DMM modes
- CATIV @ 600 V
- IEC61000-4-30 Class A compliant

ORDERING INFORMATION FOR MPQ1000		
Cat. No.	View Datasheet	Warranty (years)**
MPQ1000 - Basic	↓	1
MPQ1000 - Silver		1
MPQ1000 - Silver Plus		1
MPQ1000 - Gold		1
MPQ1000 - Gold Plus		1
MPQ1000 - Platinum		1
MPQ1000 - Platinum Plus		1

** Extended warranty available for some products





Products for Wind Power Applications

Generators

Each Wind turbine has a generator to convert the mechanical rotation into electrical energy



5/10/15 KV DC INSULATION RESISTANCE TESTERS

- Measures up to 30 TΩ
- Safety rated up to CAT IV 1000 V to 3000 m
- Unique dual-case design - additional user protection
- Operates from battery or a.c. mains supply
- Rapid charge Li-ion battery
- Advanced memory with time/date stamp

ORDERING INFORMATION FOR 5/10/15-KV INSULATION TESTERS

Cat. No.	View Datasheet	Max Test Voltage	Max Reading	Download
MIT515	↓	5.0 kV	10 TΩ	NO
MIT525		5.0 kV	10 TΩ	YES
MIT1025		10.0 kV	20 TΩ	YES
MIT1525		15.0 kV	30 TΩ	YES




MTR105

- Full color graphic display
- 3 Phase insulation resistance
- Temperature correction for insulation resistance
- Guard terminal
- DLRO four wire Kelvin
- Continuity and diode test
- Motor direction of rotation
- Capacitance and inductance
- CAT III 600 V up to 3000 m
- Environmental protection to IP54

ORDERING INFORMATION FOR MTR105

Cat. No.	View Datasheet	Description	Max Voltage	Frequency	Warranty (years)**
1010-361	↓	MTR105 Rotating Machine Tester	1 kV	400	1

** Extended warranty available for some products

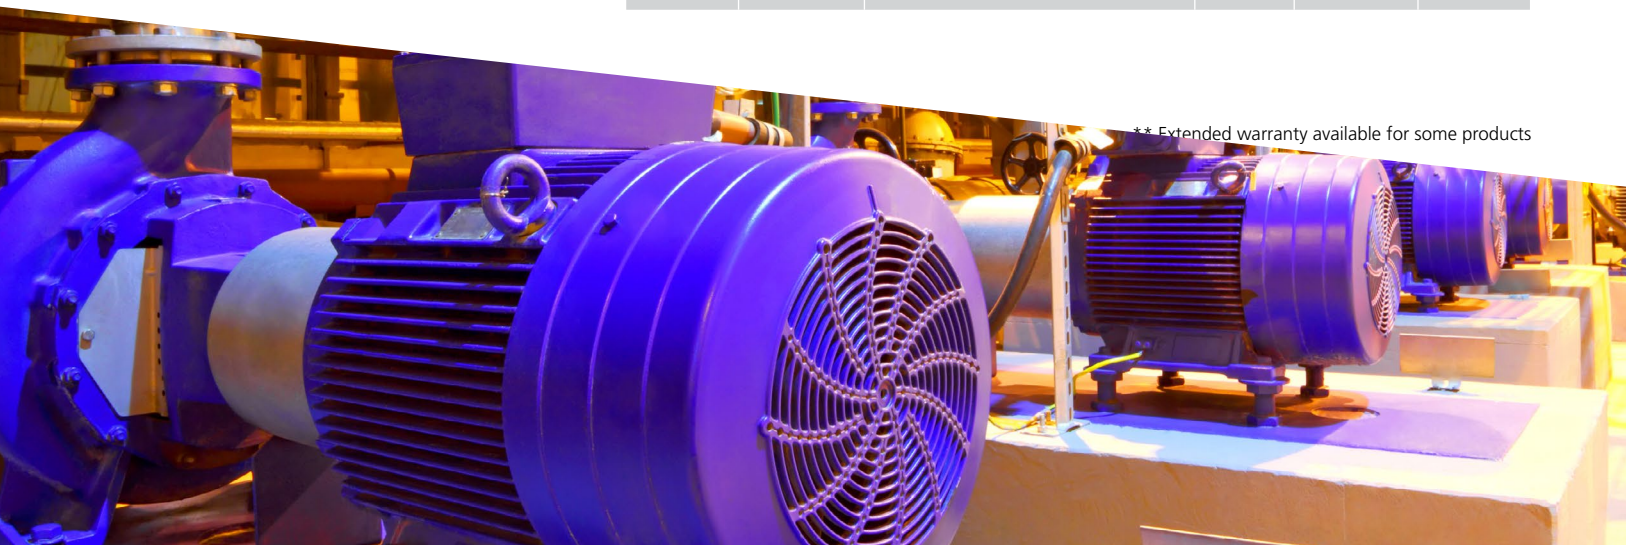



Products for Wind Power Applications Lightning Protection System



DLRO2 / DLRO2X

- Noise Rejection mode with Confidence Meter™ (DLRO2X)
- Manual and auto save results for export to USB (DLRO2X)
- 'Difference Meter' for quick data comparisons
- Use very long test leads at 1 A using dedicated test mode
- Safely test the resistance of inductive loads at 1 A
- <600 V active protection against inadvertent live connections without blowing a fuse
- Ideal for outdoor use with protection against dust and moisture to IP54
- Industry standard safety rated at CAT III 600 V/CAT IV 300

ORDERING INFORMATION FOR DLRO2 / DLRO2X

Model	Cat. No.	View datasheet	Description	Warranty (years)**
DLRO2	1012-280	↓	2 Amp Handheld Ducter™ Low Resistance Tester	3
DLRO2X	1013-795		2 Amp Handheld Ducter™ Low Resistance Tester with data storage	3



DLRO10HDX

- Onboard memory storage for test results up to 200 records
- Download to PowerDB
- Interchangeable test lead terminations
- High or low output power selection for condition diagnosis
- Battery or AC mains supply
- Protected to 600 V without blowing a fuse, test lead live voltage warning light
- Heavy duty case: IP 65 lid closed, IP54 operational
- Printer output and memory

ORDERING INFORMATION FOR DLRO10HDX

Cat. No.	View Datasheet	Description	Warranty (years)**
1008-052	↓	DLRO10HDX Low Resistance Ohmmeter	1



DLRO10X

- Accurate results in under three seconds
- Auto current reversal cancels standing emfs
- Fuse protected to 600 V
- NiMH battery reduces weight
- 250 mW power limit (with optional override) to avoid heating the test sample
- Automatically detects continuity in potential and current connections
- Visible warning of high voltages present at the terminals
- Visible warning of current flowing in the test sample
- Alpha-numeric keypad for entering test notes
- User setable high and low limits
- Autoranging with Manual option

ORDERING INFORMATION FOR DLRO10X

Cat. No.	View Datasheet	Description	Warranty (years)**
1006-659	↓	DLRO10X Low Resistance Ohmmeter	1

Products for Wind Power Applications



Control Panels, Busbars & Contact Connections

Each Turbine has multiple electrical panels with a network of contacts and connectors. These panels must be tested at commissioning, as well as periodically tested as part of a maintenance program



DLRO10HDX

Augmenting Megger's DLRO10 and 10X range, the DLRO10HDX combines ultimate simplicity of operation with a rugged IP65 case designed for stable ground and bench operation and provides memory storage.

- Onboard memory storage for test results up to 200 records
- Interchangeable test lead terminations

ORDERING INFORMATION FOR DLRO10HDX

Cat. No.	View Datasheet	Description	Warranty (years)**
1008-052	↓	DLRO10HDX Low Resistance Ohmmeter	1



- Measures up to 10 TΩ
- PI, DAR, DD, SV and ramp test
- Improved productivity – operate from line power/mains if battery dead
- Li ion battery - extended capacity, rapid charge
- Advanced memory with time/date stamp
- CATIV 600 V safety rating

ORDERING INFORMATION FOR MIT525

Cat. No.	View Datasheet	Description	Warranty (years)**
1001-940	↓	2.5 kV Insulation Resistance Tester	1



DLRO200 - 200A MICRO-OHMMETER

- Test currents from 10 A to 200 A dc
- 0.1 μΩ best resolution
- On board memory for up to 300 test results and notes
- RS232 port to download stored results or for real time output to a printer
- Supplied with download software

ORDERING INFORMATION FOR DLRO200

Cat. No.	View Datasheet	Description	Warranty (years)**
1012-782	↓	200A Micro-ohmmeter	1

** Extended warranty available for some products



MIT2500 - 2.5KV INSULATION & CONTINUITY TESTER

- Insulation testing up to 2.5 kV and 200 GΩ range in a handheld instrument
- Guard terminal for high resistance accuracy
- Adjustable insulation test voltage from 50 V to 2500 V
- Stabilized insulation test voltage
- Rechargeable options for ac and car charging
- Single range, faster continuity testing from 0.01 Ω to 1 MΩ
- Polarization Index (PI) & Dielectric Absorption Ratio (DAR)
- CAT IV 600 V applications

ORDERING INFORMATION FOR MIT2500

Cat. No.	View Datasheet	Description	Warranty (years)**
1004-745	↓	2.5 kV Insulation Resistance Tester	1



DCM1500S 1500 A SOLAR CLAMP METER

- Auto ranging
- ac 1000V / dc 2000V
- ac/dc 1500A capability
- Smart HOLD
- MIN/MAX
- Bluetooth connection to Megger Link app
- CAT IV 600V / CAT III 1000V Safety Standards
- PV test leads with MC4PV plugs

ORDERING INFORMATION FOR DCM1500S

Cat. No.	View Datasheet	Description	Warranty (years)**
1013-357	↓	DCM1500S Solar PV Clamp Meter	1



MET1000 ALL-IN-ONE TRUE RMS ELECTRICAL TESTER

- LED and LCD display with self-test
- Detachable test probes
- ac/dc voltage to 1000 V
- 200 A ac measurement
- True RMS on ACV/ACA
- Measures voltage without batteries

ORDERING INFORMATION FOR MET1000

Cat. No.	View Datasheet	Description	Warranty (years)**
1013-099	↓	MET1000 All-in-one True RMS Electrical Tester	1

** Extended warranty available for some products

Products for Wind Power Applications



Batteries

There are backup batteries, which have the role of providing power to critical systems during fault conditions. These are essential safety devices and must be tested at commissioning and during regular maintenance work.



BITE5

- Supports battery discharge testing
- Measures impedance on cells up to 200V
- Supports lead acid, NiCad and Li-Ion
- Measures DC voltages up to 1000V
- Measures AC voltages up to 600V
- Touchscreen set-up and trending
- USB and micro SD card
- Measures AC and DC current

ORDERING INFORMATION FOR BITE3

Cat. No.	View Datasheet	Description	Warranty (years)**
BITE5	↓	Battery Tester	1



BITE2P

BITE2

BITE2 AND BITE2P

- Determines condition of lead-acid and NiCd cells up to 7000 Ah
- On-board Pass/Warning/Fail indications
- On-line testing

ORDERING INFORMATION FOR BITE2 AND BITE2P

Cat. No.	View Datasheet	Description	Warranty (years)**
BITE2	↓	Battery Impedance Test Equipment	1
BITE2P		Battery Impedance Test Equipment with built-in printer	1

** Extended warranty available for some products



Products for Wind Power Applications



Foundation Grounding

Each Wind Turbine has its own ground system which is connected to the ground systems of all other Turbines in a site. This creates a very large interconnected ground system, which is tricky to test.



DET2/3 - HIGH RESOLUTION EARTH TESTER

- High resolution of 1 mΩ, ideal for large earth (ground) systems
- Versatile tests modes
- High accuracy for earth (ground) electrode grid and soil resistivity tests
- Rechargeable battery power that can last all day with a fast re-charge (up to 10 hours)
- Robust instrument with IP65 protection
- Automatic test frequency selection, with filters and high current features
- Diagnostic trace display
- Data storage
- Large color display that shows numeric and graphical results

ORDERING INFORMATION FOR DET2/3

Cat. No.	View Datasheet	Description	Warranty (years)**
1008-949	↓	DET 2/3 ground tester without leads	1
1008-969		DET 2/3 ground tester plus lead kit - 50 m	1
1008-989		DET 2/3 ground tester plus lead kit -100 m	1



DET14/24C - GROUND RESISTANCE CLAMP TESTERS

- Elliptical clamp shape improves access to earth cables and straps up to 50 mm
- Low maintenance flat jaw interface
- Measures ground resistance from 0.05 Ω to 1500 Ω
- Measures true RMS ground leakage current from 0.5 mA rms to 35 A rms
- CAT IV 600 V safety rating
- Backlit LCD display

ORDERING INFORMATION FOR DET14/24C

Cat. No.	View Datasheet	Description	Warranty (years)**
1000-761	↓	256 records	1
1007-331		2000 records downloadable via Bluetooth	1

** Extended warranty available for some products



Products for Electric Vehicles

Charger Maintenance

It is important to check electric vehicle chargers following installation and as part of a regular maintenance schedule.



EVCC300 - ELECTRIC VEHICLE CHARGER CHECKER

- Checks mode 2 and single phase mode 3 (level 1 and two phase level 2) chargers
- Checks chargers with SAE J1772 Type 1 and Type 2 connectors
- Performs four EV charger safety checks
- Performs four EV charger operation checks
- Checks to see if nuisance tripping or RCD/GFCI is likely to occur
- Reads control pilot state response from EV Charger to IEC61852-1



ORDERING INFORMATION FOR EVCC300

Cat. No.	View Datasheet	Description	Warranty (years)**
1013-576		EVCC300 Electric Vehicle Charger checker	1

** Extended warranty available for some products





Electrical Test Equipment Catalog

MULTI-METERS/CLAMP-ONS AND TESTERS



DCM310, DCM320, DCM340 CLAMPMETERS

- Resistance measurement up to 20 MΩ on DCM320; 400 Ω on DCM340
- Measure ac current up to 600 A
- Data hold feature
- Meet safety requirements of IEC 1010 CAT III 600V

DCM310



DPM1000 POWER CLAMP METER

- dc and ac current up to 1000 A
- True RMS measurement for greater accuracy
- Large jaw size safely assists with uninsulated conductor measurements
- 1000 Vac and 1000 Vdc
- Resistance, continuity, frequency, phase rotation, capacitance, in-rush current, power factor, wattage, harmonics, diode test, temperature.
- Peak, min/max and data-hold functions



DCM305E

- 0.001 mA resolution
- Up to 100 A range for standard ac current measurements
- Low pass filter to aid stability of readings
- Auto, data and peak hold
- 40 mm jaw
- Analog bargraph display for trending



DCM1500 1500 A TRMS CLAMP METER

- dc and ac current up to 1500 A
- True RMS measurement for greater accuracy
- Large jaw size safely assists with uninsulated conductor measurements
- 750 Vac and 1000 Vdc
- Resistance, continuity and frequency
- Peak, min/max and data-hold functions



AVO215 - CAT III TRMS MULTIMETER

- 4000 count display
- AC / DC Voltage to 600 V
- AC / DC Current to 10 A
- True RMS
- Resistance, capacitance, frequency ranges
- Duty cycle
- Auto ranging
- Auto power off
- Data hold
- Max/Min
- Built in flashlight
- Rear tilt stand
- CAT III 600 V Rating

ORDERING INFORMATION DCM SERIES

Cat. No.	View Datasheet	Measurement Range	Warranty (years)**	Cat. No.	View Datasheet	Measurement Range	Warranty (years)**
DCM305E	↓	100 A ac	1	DCM340-EN	↓	600 A ac/dc	1
DCM310-EN	↓	400 A ac	1	DCM1500	↓	1500 ac/dc	1
DCM320-EN	↓	400 A ac	1				
DPM1000	↓	1000 A ac/dc	1	AVO215		CAT III TRMS multimeter	

** Extended warranty available for some products

TPT420 CATIV 1000V 2 POLE TESTER

- CAT IV/1000 V
- IP64 Rated
- 12 - 1000 V ac / 12 - 1500 V dc
- Continuity test function with visual and acoustic indication
- Voltage indication with no batteries
- Single pole voltage test
- Phase rotation indication
- Integrated flashlight



ORDERING INFORMATION FOR TPT420

Cat. No.	View Datasheet	Description	Warranty (years)**
1013-189	↓	TPT420 CATIV 1000 V 2 Pole Tester	1

MET1000 ALL-IN-ONE TRUE RMS ELECTRICAL TESTER

- LED and LCD display with self-test
- Detachable test probes
- ac/dc voltage to 1000 V
- 200 A ac measurement
- True RMS on ACV/ACA
- Measures voltage without batteries



ORDERING INFORMATION FOR MET1000

Cat. No.	View Datasheet	Description	Warranty (years)**
1013-099	↓	MET1000 All-in-one True RMS Electrical Tester	1

MPU690 PROVING UNIT

- 5 stepped nominal output voltages (50 to 690) V ac
- Automatic operation
- High output power suitable for test lamps
- Extended battery life
- Magnetic base
- Rugged case



ORDERING INFORMATION FOR MPU690

Cat. No.	View Datasheet	Description	Warranty (years)**
1001-561	↓	MPU690 Proving Unit	1

** Extended warranty available for some products

AC VOLTAGE DETECTORS

- Non-contact detection of ac voltage
- Automatic audible warning buzzer
- Vibration alert (VF5)
- Also doubles as a flashlight
- Low and medium voltage mode with color changing LED (VF5)



VF5 sold in pack of 12 only

ORDERING INFORMATION FOR AC VOLTAGE DETECTORS

Cat. No.	View Datasheet	Description	Warranty (years)**
1000-213	↓	VF2 ac Voltage Detector	1
1013-098	↓	VF5 ac Voltage Detector	1

Electrical Test Equipment Catalog

TIME DOMAIN REFLECTOMETERS

Whether locating cable faults or testing the integrity of communication, power, or control cables, TDRs available from Megger provide fast and accurate results. Models with built-in or

optional blocking filters can be used on energized cable up to a specified voltage limitation. Models without blocking filters are for de-energized cable only.

CFL535G TIME DOMAIN REFLECTOMETER



The CFL535G is a dual channel, compact Time Domain Reflectometer for locating faults on metallic cables. It has a minimum resolution of 0.1m/0.3ft and a 20km/60kft maximum range depending on velocity factor selected and cable type.

- Comprehensive dual channel capability with dual aspect display
- AUTO set up for instant use
- Ultra fast pulse for near-end fault identification
- One button press Xpert guidance to potential fault
- IP54 rating offers real life working conditions
- Designed for use on all metallic cable pairs
- Toughened and fully bonded LCD screen viewable in all light conditions
- CAT III 300 V, CAT IV 150 V



See CFL535G ordering information on page 40.



TDR2010 TIME DOMAIN REFLECTOMETER



The TDR2010 has the same features as the CFL535G with added trace tagging.

The addition of the trace tagging function allows you to maintain accurate records of circuit details against every saved result.

See TDR2010 ordering information on page 49.



TDR2050 TIME DOMAIN REFLECTOMETER



The same as TDR2010 but with the addition of 600 V CAT IV rating, Step, Distance Dependant Gain (DDG), and FindEnd functions. This unit can also be used on energized circuits.

See TDR2050 ordering information on page 49.

** Extended warranty available for some products

Electrical Test Equipment Catalog



CFL510G TIME DOMAIN REFLECTOMETER



- Single trace display with dual cursor
- 2 ns fast pulse for near-end fault identification
- Trace hold with live trace overlay
- Last setting memory
- 14 hour battery life



TDR500/3



- Simple operation
- AUTO selection of gain and pulse width
- Ultra fast pulse for near end fault identification
- Trace HOLD feature
- IP54 rating offers real life working
- Designed for use on all metallic cable pairs

ORDERING INFORMATION FOR TIME DOMAIN REFLECTOMETERS

Model	TDR500/3	CFL510G	CFL535G	TDR2010	TDR2050
Measurement Ranges (full scale)	30, 75, 300, 750, 3000, 7500, 15000 ft (10, 25, 100, 250, 1000, 2500, 5000 m)	30, 75, 300, 750, 3000, 7500, 15,000 ft (10, 25, 100, 250, 1000, 2500, 5000 m)	Up to 65616 ft (20000 m) in 11 steps	Up to 65616 ft (20000 m) in 11 steps	Up to 65616 ft (20000 m) in 11 steps
View Datasheet	↓	↓		↓	
Warranty					

** Extended warranty available for some products



Electrical Test Equipment Catalog

CABLE AND PIPE LOCATOR

EASYLOC

The Easyloc is fast and simple to operate, with features designed to avoid potentially dangerous power cables and other services as efficiently as possible. The Easyloc receiver shows the signal level received and marks the maximum with a marker.

This means operators work with both an audio signal and visual confirmation at all times. Depth measurement is possible at the push of a button, even when using the power mode, but only with Easyloc Standard.

Easyloc is suitable for water, rail, gas, power, highways, and telecommunication utilities, as well as contractors, groundworks, building, local authorities, civil engineering, streetlighting and fencing, gardening and landscaping companies.

- Make optimum preparations for your building work, quickly and reliably
- Semi-automatic sensitivity control
- Depth measurement, even without transmitter
- Compatible with other location systems
- High-performance transmitter
- Big display with easy menu structure and automatic backlight



ORDERING INFORMATION FOR EASYLOC			
Cat. No.	View Datasheet	Description	Warranty (years)**
890005617-S	↓	Easyloc Standard System complete - Receiver Easyloc RX Standard, Transmitter Easyloc TX, Grounding set, Ground stake, carry bag, user manual	1

EASYLOC OPTIONAL ACCESSORIES		
Cat. No.	View Datasheet	Description
810696	↓	Sonde, 33 kHz / ø .75 in (18.5 mm)
820005314		Transmitter clamp 4 in (100 mm)
890008854		House connection set
890004303		Grounding set (included earth stake, earth reel)



** Extended warranty available for some products

THERMAL CAMERA

TC3231 THERMAL CAMERA

The TC3231 combines the convenience of an infrared thermometer with the visual advantage of a thermal imager, which provides a troubleshooting camera with an infrared heat map. The unit offers a professional infrared 32x31 pixels image thermometer with a 2.2 in. color TFT LCD. It covers a wide range of surface temperature measurements.

The TC3231 features a range of thermal image display color palette options and high/low user preset temperature alarms. The user can also set the background temperature.

Additionally, the TC3231 is the ideal accessory for the MIT5/10/15 kV insulation testers, MPQ1000, and MTR105.



ORDERING INFORMATION FOR TC3231

Cat. No.	View Datasheet	Description	Warranty (years)**
1012-514		TC3231 Thermal Camera	1

** Extended warranty available for some products



Electrical Test Equipment Catalog

POWER QUALITY



MPQ1000

The Megger MPQ1000 Power Quality Analyzer is an advanced, highly intuitive, handheld 3-phase analyzer that delivers unmatched capability in a smart ergonomic platform. View RMS data, waveforms, demand data, phase angles, harmonics, unbalance, flicker, and more in real-time with the MPQ1000 scope mode and DVM mode. When data needs to be recorded, the MPQ1000 record verification will automatically identify the current clamps, recognize their range and verify the unit is connected properly. Simply connect it and push the record button.

The MPQ1000 can record for extended periods of time because of its massive memory. It utilizes an SD card, which makes expanding the memory as easy as installing a new SD card. The recorded data can be viewed on the MPQ1000 color VGA display or the data can be transferred to the high power Megger PQ Power Quality Analysis software via USB cable, USB stick, Ethernet or directly from the SD card.

- Automatic CT recognition
- Automatic connection verification
- On-board data analysis
- SD card and USB stick support
- 1000 V ac and 1000 V dc range
- Scope and DMM modes
- CATIV @ 600 V
- IEC61000-4-30 Class A compliant



ORDERING INFORMATION FOR MPQ1000

Cat. No.	View Datasheet	Warranty (years)**
MPQ1000 - Basic	↓	1
MPQ1000 - Silver		1
MPQ1000 - Silver Plus		1
MPQ1000 - Gold		1
MPQ1000 - Gold Plus		1
MPQ1000 - Platinum		1
MPQ1000 - Platinum Plus		1

** Extended warranty available for some products

MPQ1000 BASIC KIT

Includes MPQ1000 analyzer, voltage leads, 32GB SD card, USB cable, ethernet cable, universal power adapter, soft-sided carry bag plus fuse adapters and hanging strap.

Does not include current clamps..

See ordering information on page 40.



MPQ1000 Basic Kit - C/N MPQ1000-BASIC

MPQ1000 SILVER KITS

Includes MPQ1000 analyzer, voltage leads, 32GB SD card, USB cable, ethernet cable, universal power adapter, soft-sided carry bag, plus hanging strap, voltage lead plunger clips, and 3 MCCV6000-18 (four range flex 18 cm ID) CTs

Silver Plus kit: The same as the Silver kit above except with 4 MCCV6000-18 CTs.

See ordering information on page 40.



MPQ1000 Silver Kit - C/N MPQ1000-S-KIT



MPQ1000 Silver Plus Kit - C/N MPQ1000-S-KIT-PLUS

MPQ1000 GOLD KITS

Gold kit: MPQ1000 analyzer, voltage leads, 32GB SD card, USB cable, ethernet cable, universal power adapter, soft-sided carry bag, plus hanging strap, voltage lead plunger clips, and 3 MCCV6000-27 (four range flex 27 cm ID) CTs

Gold Plus kit: The same as the Gold kit above except with 4 MCCV6000-27 CTs.

See ordering information on page 40.



MPQ1000 Gold Kit - C/N MPQ1000-G-KIT



MPQ1000 Gold Plus Kit - C/N MPQ1000-G-KIT-PLUS

MPQ1000 PLATINUM KITS

Includes MPQ1000 analyzer, voltage leads, 32GB SD card, USB cable, ethernet cable, universal power adapter, soft-sided carry bag, plus hanging strap, voltage lead plunger clips, and 3 MCCV6000-37 (four range flex 37 cm ID) CTs

Platinum Plus kit: The same as the Platinum kit above except with 4 MCCV6000-37 CTs.

See ordering information on page 40.



MPQ1000 Platinum Kit - C/N MPQ1000-P-KIT



MPQ1000 Platinum Plus Kit - C/N MPQ1000-P-KIT-PLUS

Electrical Test Equipment Catalog

BATTERY TEST EQUIPMENT

Megger has the right equipment for your battery maintenance requirements regardless of whether you are testing flooded lead-acid, VRLA, or Ni-Cd batteries. The BITE[®] products are so easy to use that the test can be performed quickly by one person. All BITE instruments have the ability to download to a PC for database use and further data analysis.

BITE5

The BITE5 is a battery tester that will test Lead Acid batteries, NiCad (Nickel Cadmium) batteries as well as Li-Ion batteries. The BITE5 will measure and record battery voltage, impedance and temperature. The BITE5 also supports discharge testing. It will measure the voltage and current throughout the discharge cycle. The BITE5 can also measure the impedance and temperature throughout the discharge cycle.



- Supports battery discharge testing
- Measures impedance on cells up to 200V
- Supports lead acid, NiCad and Li-Ion
- Measures DC voltages up to 1000V
- Measures AC voltages up to 600V
- Touchscreen set-up and trending
- USB and micro SD card
- Measures AC and DC current

ORDERING INFORMATION FOR BITE5

Cat. No.	View Datasheet	Description	Warranty (years)**
BITE5		Battery Tester	1



** Extended warranty available for some products

Electrical Test Equipment Catalog



BITE3

The BITE3 determines the health of lead-acid cells up to 2000 Ah by taking measurements of the most important battery parameters. It measures cell impedance, cell voltage, intercell connection resistance, and float and ripple currents. It also measures the harmonic content of the ripple current with its built-in spectrum analyzer.

The BITE3 comes complete with:

- Power DB lite software
- Dual point test leads (7 ft)
- Canvas carrying case
- Line charger
- RS232 modem cable
- Spare test lead tips

The BITE3, combined with Power DB, is extremely useful in determining the health of batteries and to plan their replacements in an orderly, non-emergent manner. The BITE3 and Power DB are the most powerful battery management system available today.

*Optional accessory DLRO10LPU also available enables the BITE3 to be powered by 120 Vac. See page 22.



ORDERING INFORMATION FOR BITE3

Cat. No.	View Datasheet	Description	Warranty (years)**
BITE3	↓	Battery Impedance Test Equipment	1



BITE2P

BITE2

BITE2 AND BITE2P

The BITE2 and BITE2P determine the condition of lead-acid and nickel-cadmium cells up to 7000 Ah such as in telco, UPS, substation, and many more.

The BITE2 is compact and is ideal for service companies and for those using laptops to interpret data on-site. Impedance measurements, along with other data such as ambient and pilot cell temperatures and ac ripple current, assist in determining the overall condition of battery systems.

The BITE2P has a built-in printer to review data, find weak cells, and leave a hard copy record at the site.

ORDERING INFORMATION FOR BITE2 AND BITE2P

Cat. No.	View Datasheet	Description	Warranty (years)**
BITE2	↓	Battery Impedance Test Equipment	1
BITE2P		Battery Impedance Test Equipment with built-in printer	1

** Extended warranty available for some products

Electrical Test Equipment Catalog

PORTABLE APPLIANCE TESTERS

Implementing a regular inspection program that includes PAT testing of electrical equipment and appliances will help protect personnel from shock hazards, facilities from electrically induced fires and businesses from litigation. For businesses that manufacture

and ship electrical products to the European Union, PAT testing at the factory will ensure that products shipped will pass import testing and not become a costly problem.

PAT450



The PAT450 is the ideal instrument for companies who engage in portable appliance testing and have a requirement to customize and adapt testing routines. Because the PAT450 conforms to the latest European regulations and standards, it enables US companies shipping electrical products internationally to ensure that their export products will pass import testing.

The PAT450 can perform earth bond continuity tests; 250V and 500V insulation tests, and a touch current test. Others include a differential leakage test, a substitute/alternative leakage test, a functional load test, and a hi-pot/flash test. The PAT450 also tests extension and power cords.

- 10,000-record on-board memory
- Large 5.7 in. ¼ VGA backlit full color screen
- 200 mA; 10 A and 25 A bond test with high duty cycle
- Selectable PASS/FAIL limits
- Works with standard barcode scanners



ORDERING INFORMATION FOR PAT450

Cat. No.	View Datasheet	Description	Warranty (years)**
1000-956 (PAT450-US)		Portable Appliance Tester	1



PAT320



The PAT320 is a full-featured portable bench-top appliance tester designed for customers who do not need the complexity of a fully configurable database of clients and results within the tester. It offers a complete range of functions to allow automatic or manual testing of the widest range of electrical equipment. It is ideal for testing the safety of electrical equipment by performing a ground bond test, an insulation test, specific ground leakage tests and operational VA tests to international standards.

- Simple pushbutton operation
- Pass/Fail indicator
- Full-color display
- Supports all regulatory test requirements (Class I and Class II equipment)

ORDERING INFORMATION FOR PAT320

Cat. No.	View Datasheet	Description	Warranty (years)**
1001-366 (PAT320-US)		Portable Appliance Tester	1

** Extended warranty available for some products

SPECIALITY TESTING



CABLE HEIGHT METER

- Ultrasonic height measurement of overhead wires and cables
- Inherently safe
- No physical connection to cables under test
- Noise and stray signal rejection
- Measures the height of up to 6 overhead cables
- 3 ranges available

ORDERING INFORMATION FOR CABLE HEIGHT METERS

Cat. No.	View Datasheet	Description	Warranty (years)**
CHM2000	↓	Telecom Cable Height Meter, 35 ft (11 m)	1
659600		Power Cable Height Meter, 50 ft (15 m)	1
659600E		Power Cable Height Meter, 75 ft (23 m)	1



Cat. 230415 shown

HIGH-POT TESTERS

- Tests all items at end of a production run for UL safety conformance
- Ground continuity check of 3-wire devices with high voltage interlock
- Leakage current adjustable on front panel from 0.3 to 12.3 mA
- One-second or continuous testing
- Automatic failure shutdown

ORDERING INFORMATION FOR HIGH-POT TESTERS

Cat. No.	View Datasheet	Description	Warranty (years)**
230315	↓	AC High-pot Tester, 0 to 3 kV ac	1
230415		AC High-pot Tester, 0 to 4 kV ac	1
230425		ac/dc High-pot Tester, 0 to 4 kV ac, 0 to 5 kV dc	1



MLM50 LASER DISTANCE METER

- 50 m Range
- Accuracy 1.5 mm (up to 10 m range)
- Single measurement mode
- Continuous measurement mode
- Automatic Max/Min
- Area Calculation
- Volume Calculation
- Meters, Feet & Inch Ranges
- 20 measurement memory
- Front or rear measurement reference
- Built-in spirit level
- IP54
- Supplied with protective belt pouch

ORDERING INFORMATION FOR LASER DISTANCE METER

Cat. No.	View Datasheet	Description	Warranty (years)**
1013-551	↓	MLM50 Laser Distance Meter	1

** Extended warranty available for some products

Electrical Test Equipment Catalog

THREE-PHASE SEQUENCE

The three-phase sequence equipment consists of a range of power line testing products including:

- Cable phasing meters to measure voltage and determine phase rotation of underground distribution systems.
- Phase sequence indicators for identifying the phase sequence and any faulty or open phase of energized lines.



Cat. No. 830220-1

CABLE PHASING METER

- Measures up to 30 kV
- Designed to phase out cables
- Battery operated
- Measures capacitance of test point if system voltage is known
- Works on capacitance test points incorporated into elbow connectors

PHASE SEQUENCE TEST SETS

Model PSI-700A

- Identifies faulty phase
- Indicates A, B or C phase
- No moving parts, batteries or binding posts and requires no power source
- Housed in a rugged, insulated enclosure



ORDERING INFORMATION FOR THREE-PHASE SEQUENCE EQUIPMENT

Cat. No.	Description	View Datasheet	Max Voltage	Frequency	Warranty (years)**
830220-1	Cable Phasing Meter	↓	30 kV	50/60	1
PSI-700A	Phase Sequence Tester	↓	700 V	50/60	1

** Extended warranty available for some products

MOTOR TEST EQUIPMENT


MTR105

The MTR105 is a state-of-the-art motor tester, equipped with Megger's full suite of insulation resistance tests, packaged in a robust and versatile handheld instrument. With all of the reliability and traditional features of Megger's original insulation testers, the MTR105 goes beyond previous testing abilities, incorporating DLRO four wire Kelvin low resistance, inductance, and capacitance tests. Additionally, this new instrument incorporates temperature correction for insulation resistance, as well as motor direction of rotation, plus supply phase rotation tests. Packaged in an over-molded case, the MTR105 is protected in the most rugged conditions, achieving an IP54 weatherproof rating.

- Full color graphic display
- 3 Phase insulation resistance
- Temperature correction for insulation resistance
- Guard terminal
- DLRO four wire Kelvin
- Continuity and diode test
- Motor direction of rotation
- Capacitance and inductance
- CAT III 600 V up to 3000 m
- Environmental protection to IP54




ORDERING INFORMATION FOR MTR105

Cat. No.	View Datasheet	Description	Max Voltage	Frequency	Warranty (years)**
1010-361		MTR105 Rotating Machine Tester	1 kV	400	1

MOTOR & PHASE ROTATION TEST SETS

- Determine the rotation direction of single and three-phase motors before connection to the line
- Identify true phase sequence of energized 50/60 Hz power lines up to 600 V
- Supplied with easily connected alligator clip leads
- Determine polarity of power and instrument transformers

ORDERING INFORMATION FOR MOTOR TEST EQUIPMENT

Cat. No.	View Datasheet	Description	Max Voltage	Frequency	Warranty (years)**
560060		Motor and Phase Rotation Tester	600 V	50/60	1
560400		Motor and Phase Rotation Tester	600 V	25/50/60/400	1



Cat. No. 560060

** Extended warranty available for some products

Electrical Test Equipment Catalog

SAFETY TEST EQUIPMENT

VOLTAGE DETECTORS AND PHASING TESTER

DETEX® VOLTAGE DETECTORS

- Verify the absence of voltage on a line or terminal of any grounded electrical system
- Flashing LEDs and piercing tone warn of phase-to-ground voltages
- Self-test ensures detector is working properly
- Continuous monitoring with no ON/OFF switch
- Fits most standard hot sticks
- All ratings per ANSI C84.1, with conformance to IEC 61243-1 guidelines for capacitive high-voltage test instruments
- Telescopic 48-in. pole retracts to 34-in. for easy storage when not in use

See ordering information on page 48.

DETEX® PHASING TESTER

- Ideal for use on grounded and ungrounded ac systems to check high-voltage fuses
- Cat. No. 510836-1 provides bright LED indication for easy visibility where lighting conditions are poor
- Equipped with two fixed-length poles connected by flexible, insulated cable
- High voltage unit is fitted with universal spline-fitting for attachment to a standard hot stick

See ordering information on page 48.

DETEX® SINGLE-POLE PHASE COMPARATOR

- Performs phase comparison with a single pole
- No connecting cable to limit distance and mobility
- Memorizes reference phase, then visual and audible indicators signal whether additional phases are in phase or in opposition
- Unit is fitted with universal spline-fitting for attachment to a standard hot stick
- Battery operated
- Complies with IEC 61481

NOTE: This unit is not a voltage detector.

See ordering information on page 48.



Cat. No. 514360-X
Voltage Detector



Cat. No. 514440-2
Voltage Detector



Cat. No. 514242-X
Transmission Line Voltage Detector



Cat. No. 510836-1
LED Phasing Tester



Cat. No. 510900
Single-pole Phase Comparator

** Extended warranty available for some products

Electrical Test Equipment Catalog

PNEUMATIC GLOVE TESTER

- Rugged molded air pump designed to test all types of rubber gloves, with maximum convenience and minimum effort
- Built-in check valve retains pressure within the glove
- Two fabric covered elastic sealing rings are provided



ORDERING INFORMATION FOR PNEUMATIC GLOVE TESTER

Cat. No.	View Datasheet	Description	Warranty (years)**
512117	↓	Pneumatic Glove Tester	1

ORDERING INFORMATION FOR VOLTAGE DETECTORS

Cat. No.	View Datasheet	Model	Operating Voltage Range	Mechanical Style	Min. Voltage (Phase to Ground)	Nominal System Voltage Range, 50/60 (phase to phase)	Weight	Warranty**
514360-5	↓	Electronic, with red LED and audible indication	4 to 14.5 kV	Spline fitted for attachment to a universal hot line pole	2.3 kV	4.16 to 13.8 kV	1.1 lb (0.5 kg)	1
514360-6			11.7 to 36.2 kV		6.8 kV	12 to 34.5 kV		1
514360-7			24.3 to 72.5 kV		14 kV	24.94 to 69 kV		1
514360-8			2.3 to 7.2 kV	48-in. telescopic pole	1.2 kV	2.4 to 6.9 kV	2.2 lb (1 kg)	1
514242-1		Spline fitted for attachment to a universal hot line pole	67 to 235 kV	38 kV	69 to 230 kV	1.5 lb (0.67 kg)	1	
514242-2			200 to 550 kV	115 kV	230 to 500 kV		1	
514440-2		White LED	3.6 to 36.5 kV	48-in. telescopic pole	2.1 kV	4.16 to 34.5 kV	2.1 lb (0.95 kg)	1

ORDERING INFORMATION FOR PHASING METERS

Cat. No.	View Datasheet	Model	Nominal System Voltage Range, 50/60 Hz (phase to phase)	kV Indicator Markings*	Mechanical Style	Pole Length	Cable Length	Warranty**
510836-1*	↓	LED	4.16 to 34.5 kV	0, 4.2, 7.2, 13, 25, 35	Two fixed length poles with hand guards	43 in. (1092 mm)	54 in. (1372 mm)	1
510900			10 to 30 kV	None	Spline fitted for attachment to a universal hot line pole	35 in. (880 mm)	N/A	1

TEST AND MEASUREMENT SOFTWARE

POWER DB

PowerDB Lite software is used for managing instrument test results and archiving test forms that can be used for generating formal test reports. This solution for test data form creation is supplied free of charge with selected Megger instruments.

For more information on PowerDB, log onto our website — us.megger.com

PowerDB Lite software can be used with:

- Insulation testers
- DLROs
- Ground Testers
- MTR motor tester
- Battery testers
- Oil test Sets

** Extended warranty available for some products

Electrical Test Equipment Catalog

MISCELLANEOUS TESTING EQUIPMENT

MFL205 FUSE LOCATOR

- Identify circuit breakers or fuses
- Auto-Sensitivity adjustment
- Audible and visual indication
- 110/230 V operation
- Industry standard 4 mm connectors
- Red and Black crocodile clips supplied
- Carry case included



MSL10 STUD LOCATOR

- Locate wooden joists or studs
- Locate metal joists or studs
- Locate live AC cables
- Adjustable depth range
- Audible and visual indication
- Red and Black crocodile clips supplied
- Carry case included



ORDERING INFORMATION FOR MFL205

Cat. No.	View Datasheet	Description	Warranty (years)**
1013-835	↓	Fuse Locator	1

ORDERING INFORMATION FOR MSL10

Cat. No.	View Datasheet	Description	Warranty (years)**
1013-547	↓	Stud Locator	1

LA-KIT LAMP ADAPTOR KIT

- 5 most common lamp adaptors
- Allows easy testing at the lamp sockets
- IEC61010 compliant
- Supplied with 2-wire lead set
- Carry case included



ORDERING INFORMATION FOR LAMP ADAPTOR KIT

Cat. No.	View Datasheet	Description	Warranty (years)**
1014-833	↓	Lamp Adaptor Kit	1



The Megger MCT105 kit includes a separate transmitter and receiver. It is designed to help detect and trace cables or metallic conductors in walls or buried underground, locate and identify fuses or breakers on electrical circuits as well as finding breaks or short circuits in cables and electrical underfloor heating systems. It can also be used for tracing metal water and heating pipes.

MCT105 CABLE LOCATOR

- Trace cables and conductors in walls
- Works on both live and dead cables or conductors
- Locate conductor breaks and short circuits
- Identify fuses and circuit breakers
- Trace conductors buried in the ground
- Trace metal water and heating pipes
- Visual and audible signal strength indication
- Non-contact voltage detector (Receiver)
- Automatic or manual sensitivity adjustment
- Built In torch (Receiver)

ORDERING INFORMATION FOR CABLE LOCATOR

Cat. No.	View Datasheet	Description	Warranty (years)**
1013-836	↓	MCT105 Cable Locator	1

** Extended warranty available for some products

CROSS-REFERENCE GUIDE

Cat. No.	Description	Page	Cat. No.	Description	Page
210170.....	Major Megger.....	11	DLRO200.....	DLRO, 200 Amp.....	30
212159.....	Major Megger.....	11	DPM1000.....	Power Clamp Meter.....	46
212359.....	Major Megger.....	11	EASYLOC.....	Cable and Pipe Locator.....	50
230315.....	AC High-pot Tester.....	57	EVCC300.....	Electric Vehicle Charger Checker.....	44
230415.....	AC High-pot Tester.....	57	LA-KIT.....	Lamp Adaptor Kit.....	62
230425.....	AC/DC High-pot Tester.....	57	MCT105.....	Cable Locator.....	62
247000 Series.....	General Purpose DLROs.....	23	MET1000.....	True RMS Electrical Tester.....	47
510836-1.....	Detex Phasing Tester.....	60	MFL205.....	Fuse Loactor.....	62
510900.....	Single-pole Phase Comparator.....	60	MFT70.....	Multifunction Tester.....	17
512117.....	Pneumatic Glove Tester.....	61	MIT1025.....	10-kV Insulation Tester.....	5
514242-X.....	Detex Voltage Detectors.....	60	MIT1525.....	10-kV Insulation Tester.....	4
514360-X.....	Detex Voltage Detectors.....	60	MIT200 Series.....	1-kV Insulation Testers.....	9
514440-2.....	Detex Voltage Detector.....	60	MIT2500.....	2.5-kV Insulation Tester.....	7
550005B.....	Single Phase TTR.....	18	MIT300 Series.....	1-kV Insulation Testers.....	9
560060.....	Motor and Phase Rotation Tester.....	59	MIT400/2 Series.....	1-kV Insulation Testers.....	8
560400.....	Motor and Phase Rotation Tester.....	59	MIT515.....	5-kV Insulation Tester.....	5
659600.....	Power Cable Height Meter.....	57	MIT525.....	5-kV Insulation Tester.....	5
830220-1.....	Cable Phasing Meter.....	57	MLM50.....	Laser Distance Meter.....	50
AVO215.....	CAT III TRMS multimeter.....	46	MOM2.....	Handheld Micro-ohmmeter.....	23
BITE 2/2P.....	Battery Impedance Tester.....	55	MPDSCAN.....	Portable PD scanner.....	17
BITE 3.....	Battery Impedance Tester.....	55	MPQ1000.....	Power Quality Analyzer.....	52
BITE 5.....	Battery Tester.....	54	MPU690.....	Proving Unit.....	47
CFL510G.....	Time Domain Reflectometer.....	49	MSL10.....	Stud Finder.....	62
CFL535G.....	Time Domain Reflectometer.....	48	MTO106.....	Transformer Ohmmeter.....	18
CHM2000.....	Telecom Cable Height Meter.....	57	MTR105.....	Rotating Motor Tester.....	59
DCM Series.....	Digital Clamp Meters.....	46	PAT320.....	Portable Appliance Tester.....	56
DCM1500.....	TRMS Clampmeter.....	46	PAT450.....	Portable Appliance Tester.....	56
DCM1500S.....	Solar TRMS Clampmeter.....	31	PVK320/330.....	Photovoltaic Kits.....	35
DCM305E.....	AC Leakage Clampmeter.....	46	PVM210.....	Irradiance Meter.....	36
DET2/3.....	Ground Tester.....	12	PSI-700.....	Phase Sequence indicator.....	58
DET14C.....	Clamp-on Ground Tester.....	16	TC3231.....	Thermal Camera.....	51
DET24C.....	Clamp-on Ground Tester.....	16	TDR500/3.....	Time Domain Reflectometer.....	49
DET3 Series.....	Earth/Ground Resistance Tester.....	14	TDR2010.....	Time Domain Reflectometer.....	48
DET4T2 Series.....	Earth/Ground Resistance Tester.....	15	TDR2050.....	Time Domain Reflectometer.....	48
DLRO10/10X.....	DLRO, 10 Amp.....	20	TPT420.....	2 Pole Tester.....	47
DLRO10HD.....	DLRO, 10 Amp.....	20	VF2.....	AC Voltage Detector.....	47
DLRO10HDX.....	DLRO, 10 Amp.....	20	VF5.....	AC Voltage Detector.....	47
DLRO100.....	DLRO, 100 Amp.....	21			
DLRO2.....	DLRO, 2 Amp.....	19			
DLRO2X.....	DLRO, 2 Amp.....	39			



Megger makes high quality instruments for the following electrical testing applications:

- Insulation Testing
- Ground Testing
- Relay Testing
- Oil Testing
- Circuit Breaker Testing
- Power Quality Analysis
- Low Resistance Testing
- Battery Testing
- Watthour Meter Testing
- Transformer Testing
- Cable Fault Locating
- Power Factor Testing
- Hi Pot Testing
- Partial Discharge

Megger manufactures electrical test and maintenance instruments for electrical power, process manufacturing, building wiring, engineering services, and communications.

Megger - Valley Forge
400 Opportunity Way
Phoenixville, PA 19460

us.megger.com



100% FOR CHILDREN

MEG-ASD_2023

