




63+



603

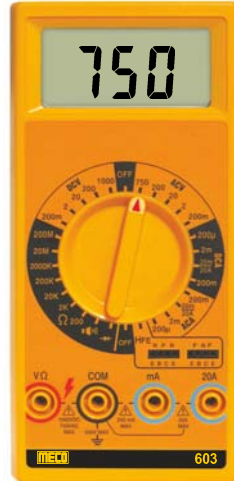

45CF

3½ Digit 2000 Counts, Audible Continuity, Diode, hFE Test, Backlight, Data Hold & Battery Test

Ranges

DC Voltage 200mV/2/20/200/1000V
Accuracy ±(0.5% rdg + 3 dgt) 200mV
±(0.8% rdg + 5 dgt) 2V, 20V, 200V
±(1.0% rdg + 5 dgt) 1000V

AC Voltage 200/750V
[45~450Hz]
Accuracy ± (2.0% rdg + 10 dgt)

DC Current 200 µA/2mA/20mA/
200mA/10A
Accuracy ±(1.8% rdg + 2 dgt) 200µA,
2mA, 20mA
±(2.0% rdg + 2 dgt) 200mA
±(2.0% rdg + 10 dgt) 10A

Battery Test Ranges : 1.5V, 9V
Resolution : 1mV, 10mV
Internal Resistance : 10.5Ω
± 1.0Ω, 780Ω ± 200Ω

Resistance 200Ω/2kΩ/20kΩ/200kΩ/
2MΩ
Accuracy ±(1.0%rdg+4dgt) on all
ranges, except
±(1%rdg+10dgt) on 200Ω

Sp. Function Audible Continuity, Battery
Test, Diode Test, hFE Test

Power Two 1.5V "AAA" Battery

Low Battery "⚡" is indicated

Battery Life 200 hours typical

Dimensions 160 x 76 x 32mm (approx.)

Weight 155gms Including Battery
(approx)

Accessories One Pair of Test Leads,
Battery [installed],
Instruction Manual

3½ Digit 2000 Counts, 17mm Large LCD, Audible Continuity, Diode & hFE Test

Ranges

DC Voltage 200mV/2/20/200/1000V
Accuracy ±(0.5%rdg+1dgt) on all
ranges

AC Voltage 200mV/2/20/200/750V
(50~500Hz)
Accuracy ±(1%rdg+4dgt) on all
ranges except
±(1.5%rdg+4dgt) on 750V

DC Current 200µA/2mA/20mA/
200mA/20A
Accuracy ±(1%rdg+1dgt) on all
ranges except
±(2%rdg+3dgt) on 20A

AC Current 200µA/2mA/20mA/
200mA/20A (50~500Hz)
Accuracy ±(1.2%rdg+4dgt) on all
ranges except
±(2%rdg+4dgt) on 20A

Resistance 200Ω/2kΩ/20kΩ/200kΩ/
2000kΩ/20MΩ/200MΩ
Accuracy ±(0.8%rdg+1dgt) on all
ranges, except
±(1%rdg+3dgt) on 200Ω
±(3%rdg+3dgt) on 20MΩ
±(5%rdg+10dgt) on 200MΩ

Sp. Function Audible Continuity,
Diode Test, hFE Test

Power One 9V battery

Low Battery "⚡" is indicated

Battery Life 200 hours typical

Dimensions 170 x 80 x 43mm (approx.)

Weight 240gms Including Battery(approx.)

Accessories One Pair of Test Leads,
Carrying Case, Battery
(installed), Instruction Manual
and Spare Fuse

4½ Digit 20000 Counts, Large LCD, Capacitance, Frequency, hFE, Infrared Remote Control Check, Live Wire Check, APO

Ranges

DC Voltage 200mV/2/20/200/1000V
Accuracy ±(0.05%rdg+5dgt)
on all ranges except
±(0.1%rdg+5dgt) on 1000V

AC Voltage 200mV/2/20/200/750V
Accuracy ±(0.8%rdg+10dgt)
on all ranges except
±(1.0%rdg+15dgt) on 750V

DC Current 2mA/20/200mA/20A
Accuracy ±(0.5%rdg+5dgt) on 2/20mA
±(0.8%rdg+5dgt) on 200mA
±(2.0%rdg+10dgt) on 20A

AC Current 20/200mA/20A
Accuracy ±(0.8%rdg+10dgt) on 20/200mA
±(3%rdg+10dgt) on 20A

Resistance 200Ω/2/20/200kΩ/2/20MΩ
Accuracy ±(0.4%rdg+5dgt)
±(0.8%rdg+5dgt) on 20MΩ

Capacitance 20/200nF/2/200µF
Accuracy ±(3%rdg+10dgt)
±(5%rdg+10dgt) on 200µF

Frequency 20kHz
Accuracy ±(1.5%rdg+5dgt)

Sp. Function Diode, Continuity, Data Hold,
hFE, Capacitance, Hz,
Infrared Remote Control Check,
Live Wire Check, APO

Power One 9V battery

Low Battery "⚡" Indicated

Battery Life 150 hours typical

Dimensions 182 x 90 x 60 mm (approx.)

Weight 365gms Including Battery (app.)

Accessories One Pair of Test Leads,
Battery (installed),
Inst.Manual & Holster